

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS

| REV | DESCRIPTION | DATE | APPROVED |
|---|---|---|---|
| A | INITIAL RELEASE | 02/05/04 | MCCORMICK |
| B | ECN 4278: ADDED OPERATING TEMPERATURE RANGE AND PACKAGING | 10/1/09 | D.FRISIELLO |
| | | | |
| | | | |




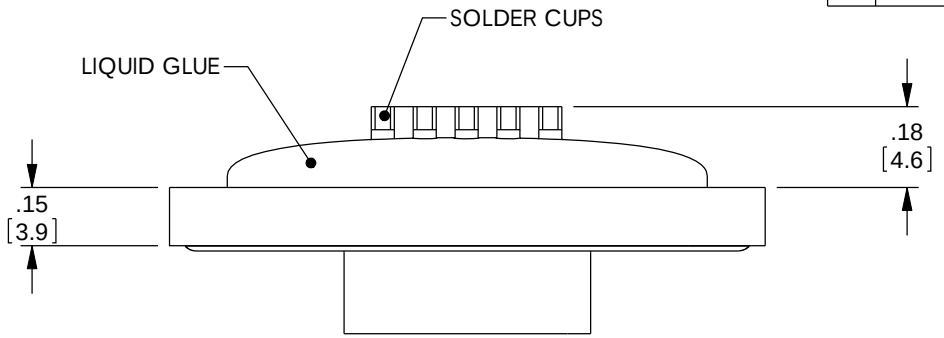




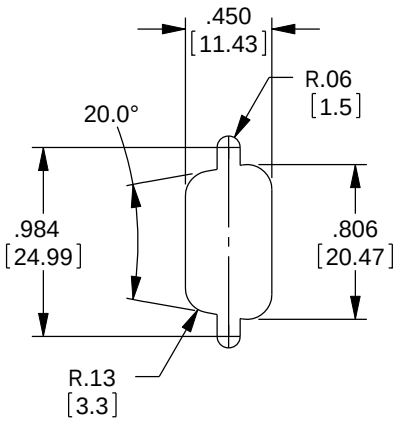4-40 HEX JACK SCREW
FOR PANEL THICKNESS
UNDER 0.05"

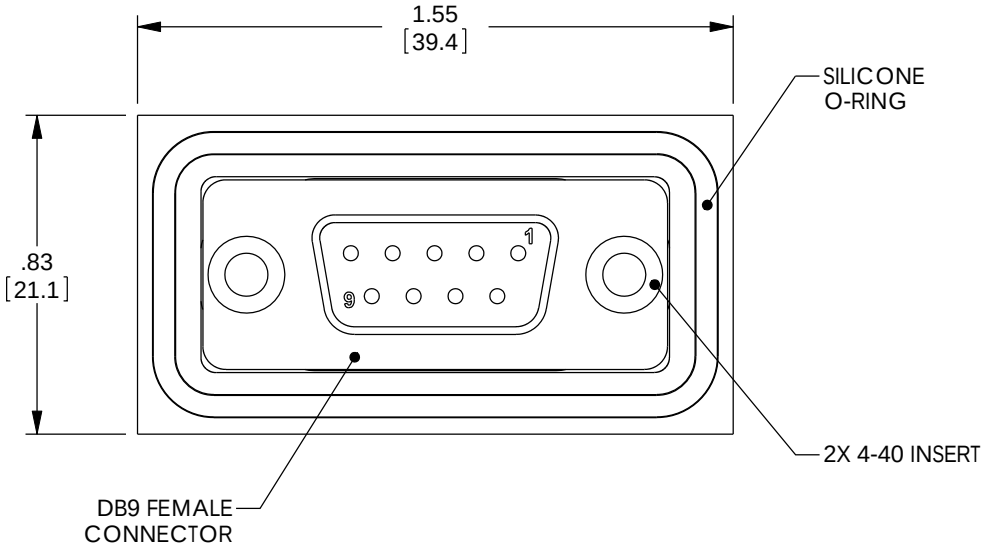


RECOMMENDED
PANEL OPENING




4-40 HEX JACK SCREW
FOR PANEL THICKNESS
BETWEEN 0.05" AND 0.078"

RoHS Compliant ✔

NOTES:

1. IP (INGRESS PROTECTION) RATING: 67.
2. OPERATING TEMPERATURE RANGE: -40˚C TO +105˚C.
3. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
DIMENSIONAL TOLERANCES:
.X = ±.1
.XX = ±.03
.XXX = ±.005
ANGULAR TOLERANCES:
ALL = ± 1°
PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY C.MCCORMICK | 02/05/2004 |
| CHECKED BY D.PARHAM | 02/05/2004 |
| APPROVED BY R.CARRICK | 02/05/2004 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
DATA CABLING

PRODUCT DESCRIPTION
DB9 FEMALE WATERPROOF SOLDER

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 43321 | WPSD9S | B |

SCALE: NONE | CAD FILE: WPSD9S.SLDDRW | SHEET 1 OF 1