SPOOL VALVE
hand or foot operated
G 1/4

3/2
Series
551

SPECIFICATIONS

FLUID	: air or neutral gas, filtered, lubricated or not
PORTS	: G 1/4
PRESSURE	: 0 to 10 bar
TEMPERATURE	: -25°C to +60°C
FLOW (Qv at 6 bar)	: 860 l/min (ANR)









CONSTRUCTION
Environmentally-protected construction
Body: treaded aluminium
Internal parts: zinc diecasting, steel, stainless steel, acetal (POM)
Sealings: nitrile (NBR) and polyurethane (PUR)

For 3/2 NC connection
1 = Pressure
2 = Outlet
3 = Exhaust

CHOICE OF EQUIPMENT

Configurator - CAD Files

Symbols functions	Operators: Pilot	Operators: Return	CODES
LEVER OPERATED			
	Lever - Lever detented		**55102088**
	Lever	Spring	**55102089**
PEDAL OPERATED			
	Pedal 2 positions		**55102090**
	Pedal	Spring	**55102091**
BUTTON OPERATED			
	Button	Spring	**55102082**
	Button push-pull		**55102083**

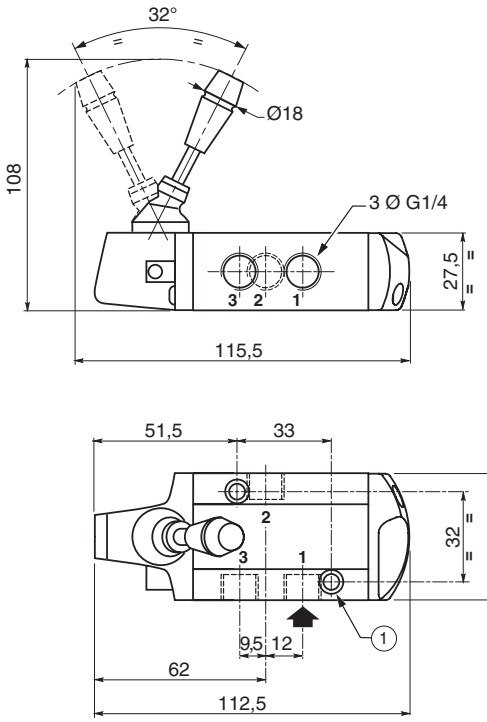
Note: do not connect the pressure supply to the exhaust port 3. For a "distributing" function or use in NO function, contact us.

These products exist in versions 5/2 and 5/3

00403GB-2016/R01
Availability, design and specifications are subject to change without notice. All rights reserved.


DIMENSIONS AND WEIGHTS

VALVE LEVER OPERATED
Weight: 0,360 kg




Configurator - CAD Files

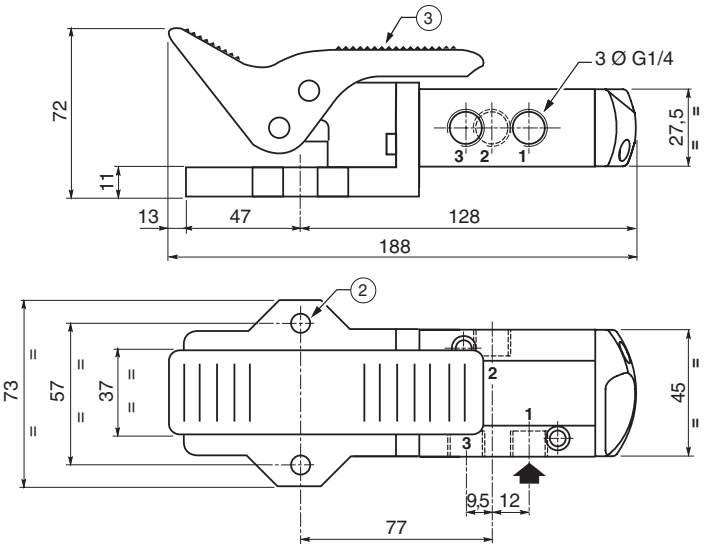VALVE PEDAL OPERATED
Weight: 0,515 kg



1. 2 fixing holes : Ø 5,3 - counterbore : Ø 9, depht 5
2. 2 fixing holes : Ø 8,5
3. Return pedal 2 positions

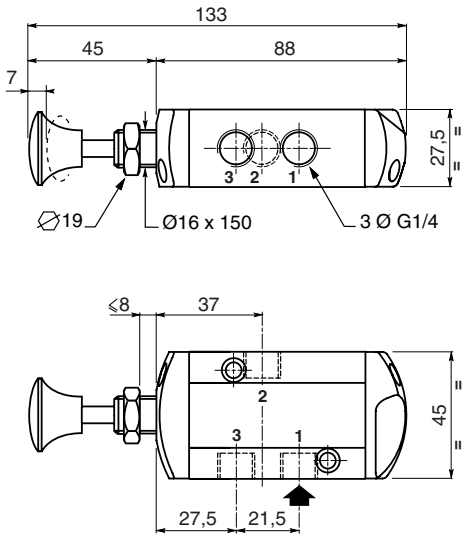BUTTON
BUTTON PUSH-PULL
Weight: 0,230 kg



00403GB-2016/R01
Availability, design and specifications are subject to change without notice. All rights reserved.