AWH - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - POWER SERIES



Standards :

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600

Description :

- Hexagonal blade with shoulder to take a wrench.
- Extra-long shank up to 250 mm for difficult and remote access.
- Silicon carbon blade: strong and resistant to flexion.
- Bi-material grip resists to impacts, abrasion, and chemicals.
- Finish: black tipped mat chromed blade.

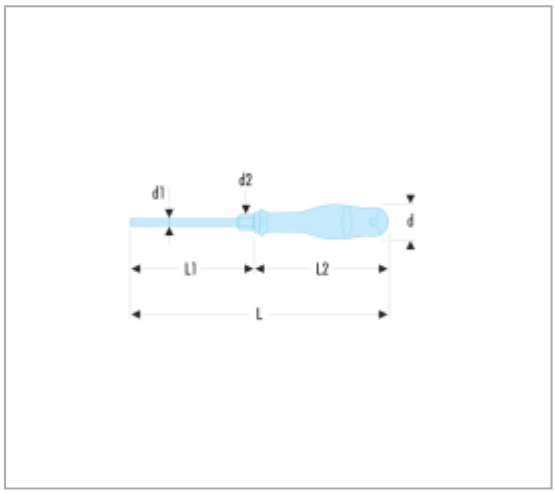

References :

	A [MM]	D [MM]	D1 X L1 [MM]	D2 [MM]	E [MM]	L2 [MM]	L [MM]	L2 [MM]	CONTAINI	[G]
AWH5,5X125	5,5	30	5 x 125	8	1,0	109	234	109		90
AWH6,5X150	6,5	36	6 x 150	10	1,2	120	270	120		135
AWH8X175	8,0	40	7 x 175	11	1,2	125	300	125		160
AWH8EX175	8,0	40	8 x 175	12	1,6	125	300	125		220
AWH10X175	10,0	40	9 x 175	14	1,6	125	300	125		320

© FACOM 2020

	A [MM]	D [MM]	D1 X L1 [MM]	D2 [MM]	E [MM]	L2 [MM]	L [MM]	L2 [MM]	CONTAINE	[G]
AWH12x200	12,0	40	10 x 200	14	2,0	125	325	125	Roll: N.38A-6A	-
AWH12X250	12,0	40	10 x 250	14	2,0	125	375	125	Roll: N.38A-5C	-
AWH14X250	14,0	40	12 x 250	16	2,5	125	375	125		450

© FACOM 2020