HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

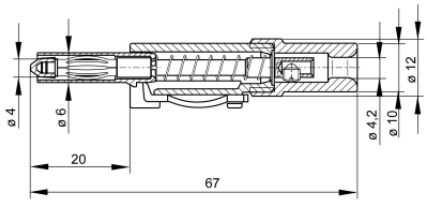
Plugs

4 mm sliding sleeve system

SLS 20 B



CE

Product	SLS 20 B
description	Touch protected plug to assemble with screw connection for cables up to 1.5mm². Insulated by latching and sprung insulating sleeve, to be released by pressure on the lateral locking spring. plug with contact spring, 4mm diameter. *Apply to this typ 150 VDC, CAT II; according IEC / EN 61010-031 item 6.4.2; allowed for devices that are equipped with terminals which cannot accept fully shrouded connectors.
operating instruction	BA413
article-no. / *colour	9318251xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 07 white Ni
drawing	
	
technical data	
connection	screw terminal
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	16 A
material plug	brass, nickel plated
housing material	POM
temperature range acc. To IEC61010(1)	-25 °C to +80 °C

inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

(1) contact the manufacturer for applications at deviating temperature ranges
(2) without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022