
UTILITY TAPS

333022 – EXTENDED LEVER HIGH NECK KITCHEN PILLAR TAP COLD

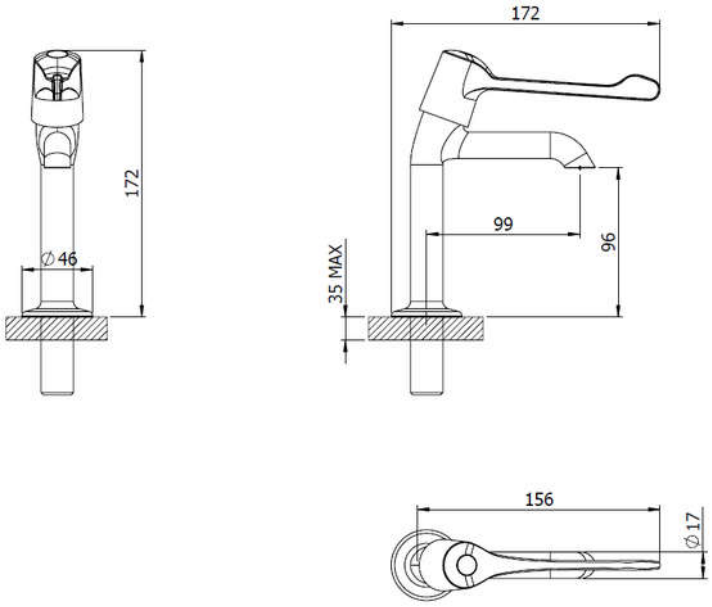

Specification	
Finish	Chrome Plate
Body	Brass
Fittings	Metal backnut & washer
Connection	1/2" BSP Threaded tail
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	85°C

Flow rates				
Pressure	**0.1**	**0.5**	**1**	**3**
L/min	3.5	10	16	28

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

Features & Benefits

5 YEAR Guarantee

Low Pressure

Inlet Tail

Single Flow

Certifications

7.5 l/min

CERTIFIED TO BRITISH STANDARD

Tested @ 0.2 bar

KM56839

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT
www.comaptaps.co.uk