
E40129

Process adapter for small volumetric flow quantities

FLOW ADAPT SI

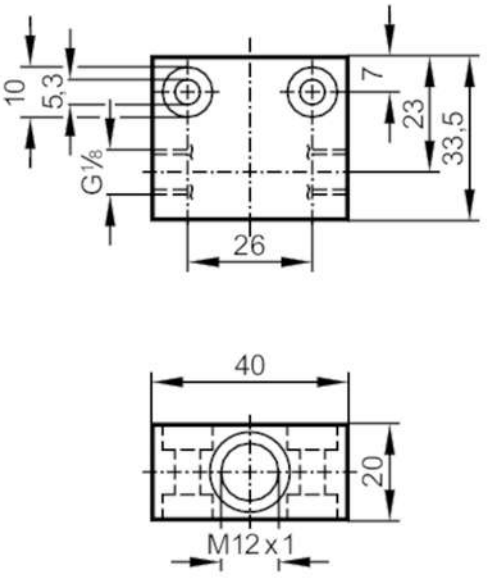

Application		
Design		for flow sensors and flow monitors
Application		for industrial applications
Installation		via internal G1/8A male thread, any mounting position
Media		liquids and gases
Medium temperature	[°C]	0...80; (Temperature gradient: 1 K/min)
Pressure rating	[bar]	300
Measuring/setting range		
Flow range	[ml/min]	2...100
Tests / approvals		
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC		The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions		The compatibility between medium and product material has to be checked in all applications.
Mechanical data		
Weight	[g]	156.5
Dimensions	[mm]	M12 x 1
Thread designation		M12 x 1
Materials		stainless steel (1.4404 / 316L)
Sensor connection		M12 x 1
Process connection		G 1/8
Accessories		
Items supplied		sealings: 1, U-seal
Accessories (optional)		Adapter: ≤ 30 bar, E40101
		Adapter: ≤ 300 bar, E40236
Remarks		
Remarks		Can only be used in combination with the flow sensor’s relative operating mode.

E40129

Process adapter for small volumetric flow quantities

FLOW ADAPT SI

Pack quantity	1 pcs.