BIM-IKT-AD4X
Magnetic Field Sensor – For Pneumatic Cylinders

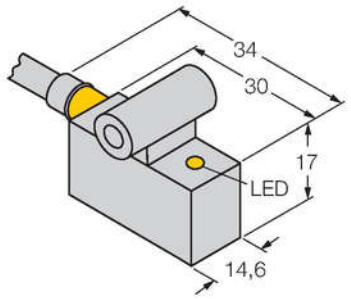

Features

- Rectangular, height 17 mm
- Metal, GD-Zn
- Magnetic-inductive sensor
- DC 2-wire, 10…65 VDC
- NO contact
- Cable connection

Wiring diagram



Technical data

Type	BIM-IKT-AD4X
ID no.	44820
Pass speed	≤ 3 m/s
Repeatability	≤ ± 0.1 mm
Temperature drift	≤ 0.1 mm
Hysteresis	≤ 1 mm
Ambient temperature	-25…+70 °C
Operating voltage	10…65 VDC
Residual ripple	≤ 10 % U_{ss}
DC rated operational current	≤ 100 mA
Residual current	≤ 0.8 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I_e	≤ 4 V
Wire breakage/Reverse polarity protection	no / Complete
Output function	NO contact, 2-wire
Switching frequency	0.3 kHz
Design	Rectangular, IKT
Dimensions	30 x 14.6 x 17 mm
Housing material	Metal, GD-Zn
Active area material	Plastic, PA12-GF30
Electrical connection	Cable
Cable quality	Ø 5.2 mm, LiYY, PVC, 2 m
Core cross-section	2 x 0.5 mm^2
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)

Functional principle

Magnetic field sensors are activated by magnetic fields and are especially suited for piston position detection in pneumatic cylinders. Based on the fact that magnetic fields can permeate non-magnetizable metals, it is possible to detect a permanent magnet attached to the piston through the aluminium wall of the cylinder.

BIM-IKT-AD4X| 04-09-2021 06-56 | Technical modifications reserved

Technical data

Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Mounting on the following profiles	
Cylindrical design	◯ ##
Switching state	LED, Yellow

Mounting instructions

Mounting instructions/Description



Accessories

KLI1	69710

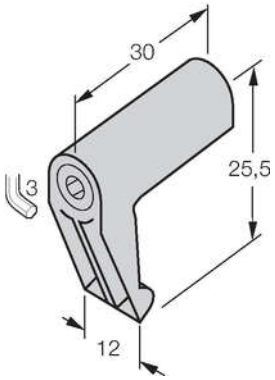

Mounting bracket for mounting magnetic field sensors on tie-rod cylinders; cylinder diameter: 32…100 mm; material: Die-cast Zinc

KLI3	69712

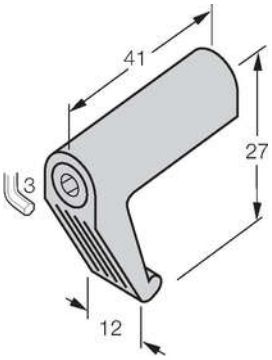

Mounting bracket for mounting magnetic field sensors on tie-rod cylinders; cylinder diameter: 63…160 mm; material: Die-cast Zinc

KLI5Z	6971803



Mounting bracket for mounting magnetic field sensors on tie-rod cylinders; cylinder diameter: 32…63 mm; material: Aluminum

KLI6Z	6971806



Mounting bracket for mounting magnetic field sensors on tie-rod cylinders; cylinder diameter: 50…125 mm; material: Aluminum

KLI5	6971802



Mounting bracket for mounting magnetic field sensors on profile cylinders; cylinder diameter: 32…50 mm; material: Aluminum

KLI6	6971805



Mounting bracket for mounting magnetic field sensors on profile cylinders; cylinder diameter: 50…100 mm; material: Aluminum

BIM-IKT-AD4X| 04-09-2021 06-56 | Technical modifications reserved

KLI7	6971810



Mounting bracket for mounting magnetic field sensors on profile cylinders with external dovetail guide; cylinder diameter: 32…200 mm; material: Aluminum

BIM-IKT-AD4X| 04-09-2021 06-56 | Technical modifications reserved