

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	04/24/17	RCLARK

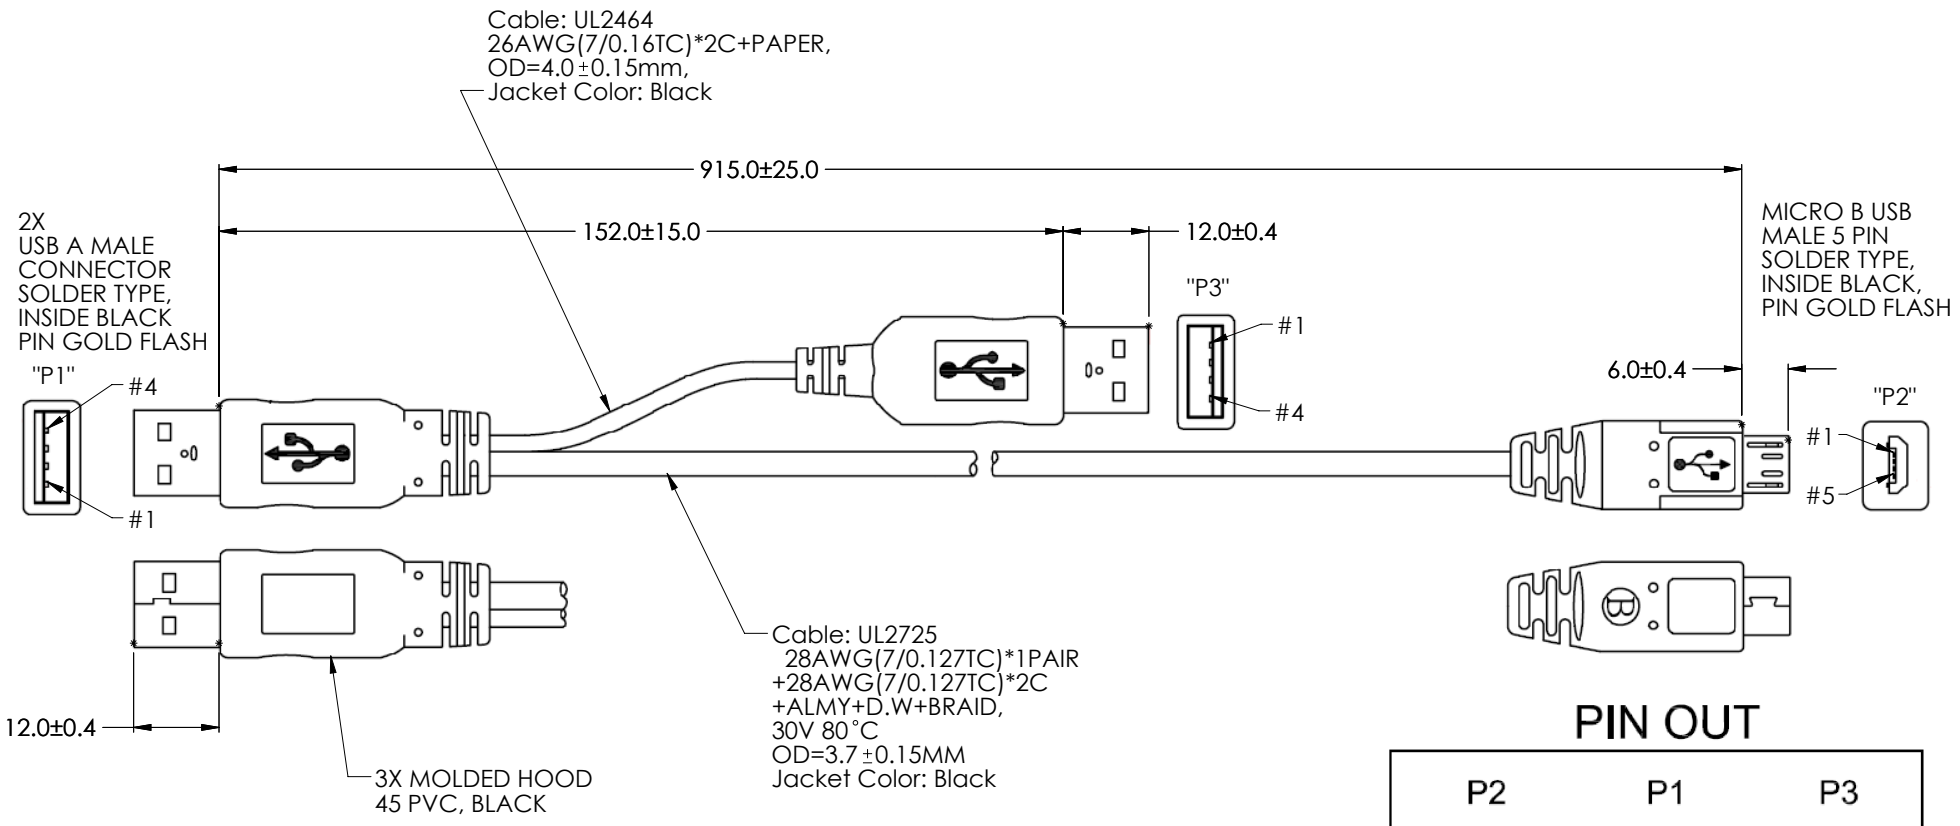

PIN OUT

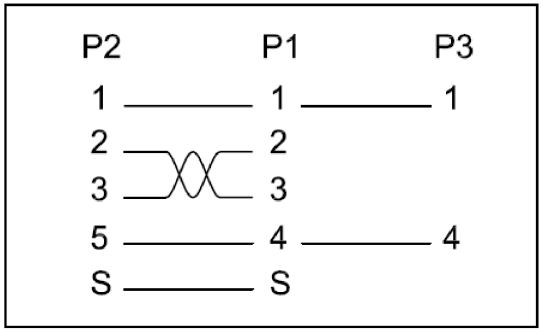

NOTES:

TESTING:
1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY

ELECTRICAL PROPERTIES:
2. CABLE SHALL BE 100% ELECTICALLY TESTED
3. VOLTAGE TEST: DC 300V 10ms
   INSULATION RESISTANCE: 5.0M ohm/min
   CONDUCTANCE RESISTANCE: 5.0 ohm/max

MACHINERY CHARACTER:
1. ALL DIMENSIONS ARE "mm" UNLESS OTHERWISE SPECIFIED
2. CABLE SHOULD BE CLEAN AND FREE OF OIL, FLASH, AND BURRS

REGULATORY COMPLIANCE:
CE 2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY R.CLARK	4/20/2017
CHECKED BY B.GATES	4/24/2017
APPROVED BY B.GATES	4/24/2017

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: USB A TO MICRO B-USB Y SPLIT

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CAUAMICBY	A

SCALE: NONE | CAD FILE: CAUAMICBY.SLDDRW | SHEET 1 OF 1