Kelvin-Messleitung mit Pinzette

- 2 Sicherheits-Winkel-Federkorbstecker, konfektioniert an hochflexibler, doppelt-isolierter PVC-Leitung 0,75 mm² und Pinzette, konfektioniert an Koaxialkabel RG 174/U
- diese Kelvin-Messleitung wurde speziell für Vierleitermessungen entwickelt
- Maulöffnung der Pinzette max. 17 mm
- den Warnhinweis WH 015 finden Sie unter www.schuetzinger.de

Best.-Nr.
KWML 8452 / PZ / 0.75 / 100

• Kontaktteile Federkorbstecker	**vernickelt**
• Kontaktteile Pinzette	**vergoldet**
• Leitung	0,75 mm² PVC-doppelt-isol., Koaxialkabel RG 174/U
• Isolierteile	PA 6.6 (Polyamid)
• **Farben**	siehe Tabelle

WH 015


Kelvin measuring lead with tweezer


- *2 safety lamella-basket angle plugs, assembled on highly flexible double-insulated PVC cable 0.75 mm² and tweezer, assembled on coaxial cable RG 174/U*
- *this kelvin measuring lead has been especially developed for four-wire measurement*
- *tweezer opening 17 mm max.*
- *please visit www.schuetzinger.de to find the warning notice WH 015*

Order No.
KWML 8452 / PZ / 0.75 / 100

• *contact parts plugs*	***nickel-plated***
• *contact parts tweezer*	***gold-plated***
• *cable*	*0.75 mm² PVC double-insul. coaxial cable RG 174/U*
• *insulation*	*PA 6.6 (Polyamid)*
• ***colours***	*see table*

WH 015

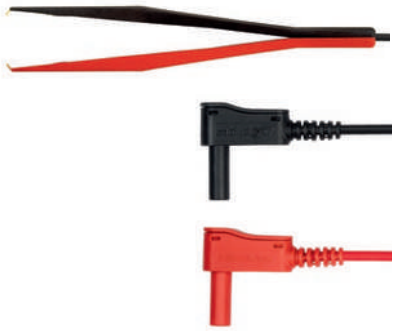

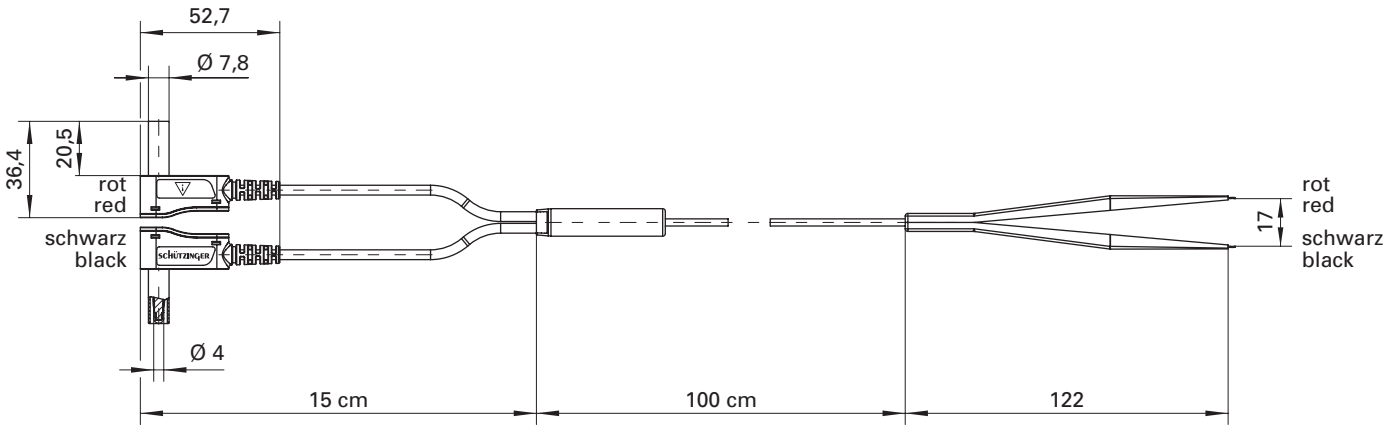

Allgemeine Angaben	
Best.-Nr. [1]	**KWML 8452 / PZ / 0.75 / 100** Kontaktteile vergoldet und vernickelt
Farben	schwarz/rot
Längen	100 cm
Technische Daten	
Leitung	PVC-doppelt-isol. 0,75 mm² Koaxialkabel RG 174/U
Bemessungsspannung [2]	30 V_{AC} / 60 V_{DC}
Bemessungsstrom [2]	1 A per Leitung
Temperatur-Einsatzbereich	von -10 °C bis +70 °C

[1] andere Kontaktoberflächen, Farben und Längen auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information	
Order No. [1]	***KWML 8452 / PZ / 0.75 / 100*** *contact parts gold-plated and nickel-plated*
colours	*black/red*
lengths	*100 cm*
Technical data	
cable	*PVC double-insul. 0.75 mm²* *coaxial cable RG 174/U*
rated voltage [2]	*30 V_{AC} / 60 V_{DC}*
rated current [2]	*1 A per lead*
operating temperature	*from -10 °C to +70 °C*

[1] *other contact platings, colours and lengths on request*
[2] *at normal ambient temperatures*