Kelvin-Messleitung

- 1 Koaxial-Sicherheits-Federkorbstecker, konfektioniert an Koaxialkabel und Sicherheits-Kelvinklemme
- diese Kelvin-Messleitung wurde speziell für Vierleitermessungen entwickelt
- Sicherheits-Kelvinklemme mit Klemmbereich Ø 30 mm
- für unsere Kelvin-Einbaubuchse **KBU 7992 L Au /**..(Farbe)
- den Warnhinweis WH 007 finden Sie unter www.schuetzinger.de

Best.-Nr.
KML 7852 Au / SAK / 150 /..(Farbe)

• Leitung	Koaxialkabel 2 x 0,75 mm²
• Kontaktteile	**vergoldet**
• Isolierteile	PA 6.6 (Polyamid)
• **Farben**	siehe Tabelle

WH 007

Kelvin measuring lead

- *1 coaxial safety lamella-basket plug, assembled on coaxial cable and safety kelvin clip*
- *this kelvin measuring lead has been especially developed for four-wire measurement*
- *safety kelvin clip with grips up to Ø 30 mm*
- *for our kelvin threaded socket **KBU 7992 L Au /**..(colour)*
- *please visit www.schuetzinger.de to find the warning notice WH 007*

Order No.
***KML 7852 Au / SAK / 150 /**..(colour)*

• *cable*	*coaxial cable 2 x 0.75 mm²*
• *contact parts*	***gold-plated***
• *insulation*	*PA 6.6 (Polyamid)*
• ***colours***	*see table*

WH 007





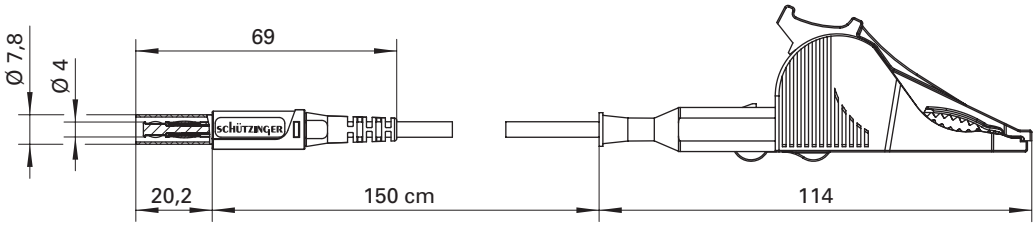

Allgemeine Angaben	
Best.-Nr. [1]	**KML 7852 Au / SAK / 150 /**..(Farbe) Kontaktteile vergoldet
Farben	schwarz, rot
Längen	150 cm
Technische Daten	
Leitung	Koaxialkabel 2 x 0,75 mm²
Bemessungsspannung [2]	33 V_{AC} / 70 V_{DC}
Bemessungsstrom [2]	10 A
Temperatur-Einsatzbereich	von -10 °C bis +80 °C

[1] andere Kontaktoberflächen, Farben und Längen auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information	
Order No. [1]	***KML 7852 Au / SAK / 150 /**..(colour)* *contact parts gold-plated*
colours	*black, red*
lengths	*150 cm*
Technical data	
cable	*coaxial cable 2 x 0.75 mm²*
rated voltage [2]	*33 V_{AC} / 70 V_{DC}*
rated current [2]	*10 A*
operating temperature	*from -10 °C to +80 °C*

[1] *other contact platings, colours and lengths on request*
[2] *at normal ambient temperatures*