

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	E	RELEASED TO PRODUCTION	5/24/01	PSRINIVAS	R.CARRICK

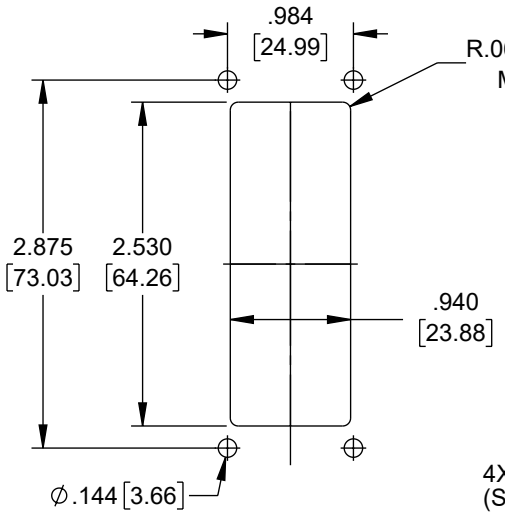


RECOMMENDED
PANEL OPENING

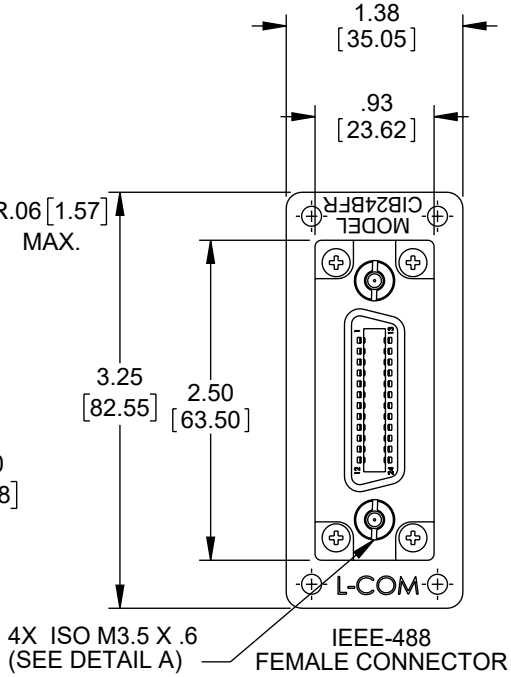



IEEE-488
FEMALE CONNECTOR

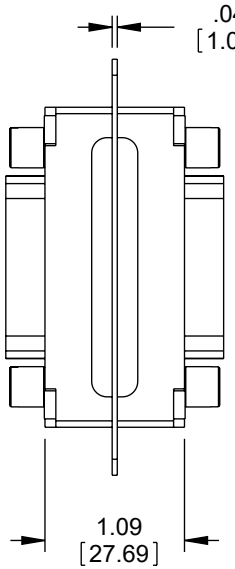

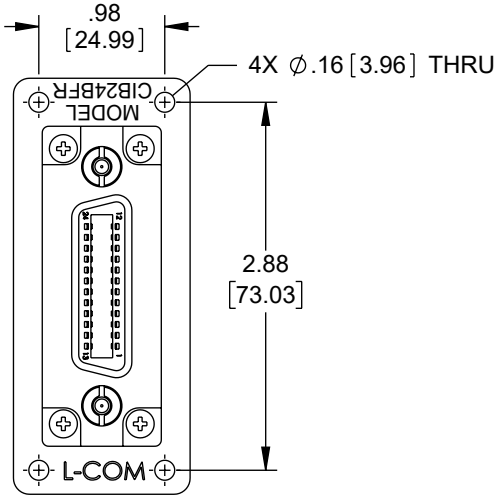

IEEE-488
FEMALE CONNECTOR

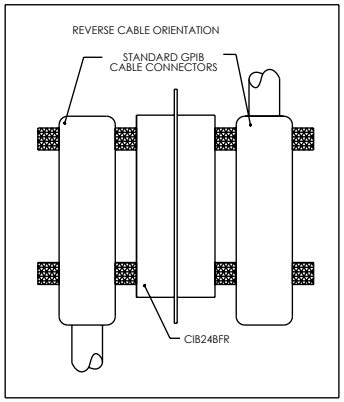

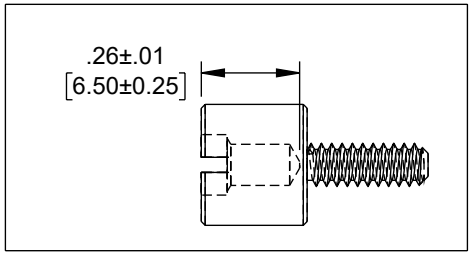

DETAIL A: INTERNAL THREAD DEPTH

NOTES:-

1. MATERIAL: HOUSING; ZINC ALLOY. INSULATOR; GLASS FILLED PBT (BLUE) U.L. 94V-0 FLAMMABILITY RATING. CONTACTS: COPPER ALLOY; SCREWLOCK: STEEL.
2. MOUNTING FLANGE: ZINC ALLOY, NICKEL PLATED.
3. FINISH: HOUSING; NICKEL PLATED. CONTACTS; 3 MICRO INCHES SELECTIVE GOLD PLATE. SCREWLOCK: BLACK OXIDE.
4. WIRING: STRAIGHT THRU.
5. TWO DUST CAPS PROVIDED WITH ADAPTOR. (NOT SHOWN)
6. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5]
.XX = ± .02 [.5]
.XXX = ± .005 [.13]
FRACTIONS ± 1/32
ANGLES ± 1°

THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY	05/24/2001
CHECKED BY	05/24/2001
APPROVED BY	05/24/2001

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
IEEE-488 GPIB

PRODUCT DESCRIPTION
REVERSING ADAPTOR,
GPIB BULKHEAD, F/F

SIZE	CAGE CODE	ITEM NO.	REV.
A	43321	CIB24BFR	E

SCALE: NONE | CAD FILE: CIB24BFR.SLDDRW | SHEET 1 OF 1

T-Rev.D1