

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/5/10	D.GRIFFIN
B	ECN 4906: CLARIFY PIN 1 AND PIN 10, ADD DIELECTRIC CALL OUT	7/14/10	D.FRISIELLO
C	ECN 5671: CN RELEASE	8/22/11	D.FRISIELLO
D	ECN 5868: ADDED LENGTHS 03 M, 075 M	12/5/11	D.FRISIELLO

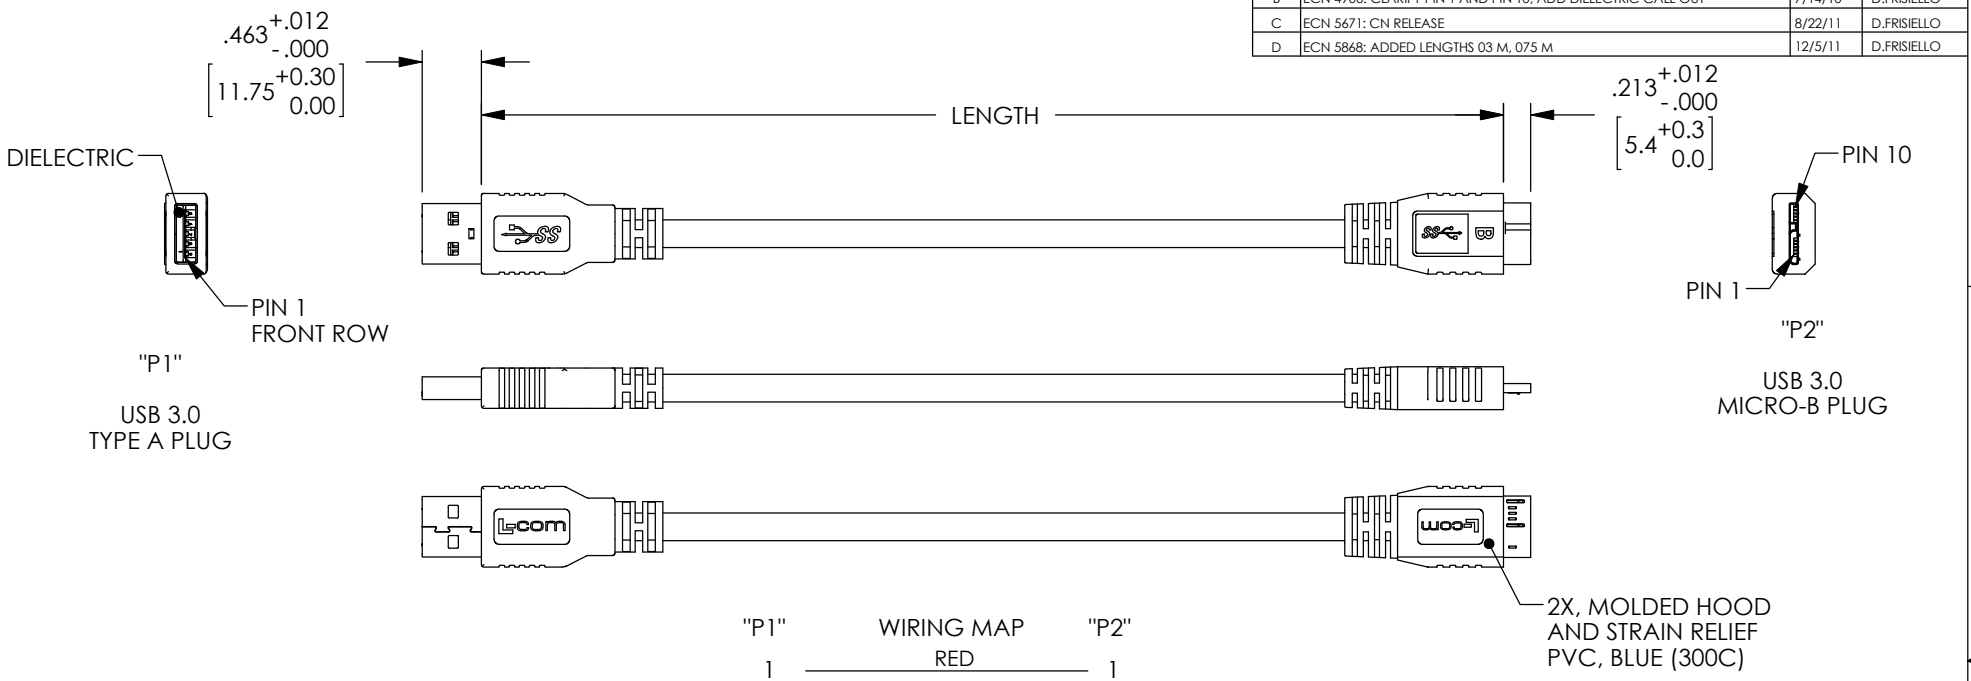

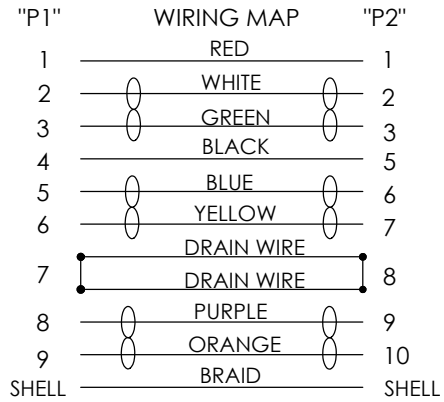

MODEL NUMBER	LENGTH METERS [FEET]
CAU3AMICB-03M	0.3 [.98]
CAU3AMICB-05M	0.5 [1.64]
CAU3AMICB-075M	0.75 [2.46]
CAU3AMICB-1M	1.0 [3.28]
CAU3AMICB-2M	2.0 [6.56]
CAU3AMICB-3M	3.0 [9.84]
CAU3AMICB-5M	5.0 [16.41]

NOTES:

CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65%
JACKET: PVC, BLUE (PANTONE 300C)

MISCELLANEOUS:
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL HAVE 360˚ SHIELD TERMINATION.
CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	4/2/10
CHECKED BY M.MARTINEZ	4/2/10
APPROVED BY S.SMITH	4/2/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB 3.0

PRODUCT DESCRIPTION
CA, USB 3.0 TYPE A-M TO MICRO B-M

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CAU3AMICB	D

SCALE: NONE | CAD FILE: CAU3AMICB.SLDDRW | SHEET 1 OF 1