
LONG-REACH LEG OUTSIDE PULLER | U.20B



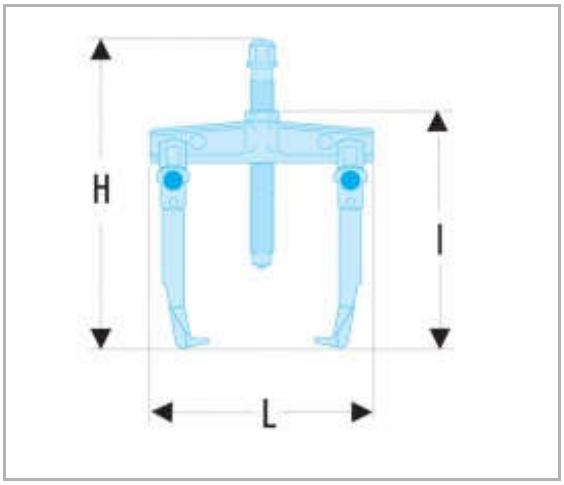

Description

• Safety: legs locked in position on the bearing using the central nut. No risk for the puller to escape from the bearing.
• Shear pin: the pin shears if torque limit is exceeded. Supplied with 2 spare pins.
• Set of 3 spare pins. U.306-24J3.
• Fitted with the anti-rotation bush U.20-12. The button protects the screw when a bar is used to block puller rotation.
• Adaptable puller accessory: slide hammer U.2.

Information

L x l x H [mm]	125 x 325 x 370
T [kN]	70
Legs	U.20BSE4
Screw	U.20-B1S
[kg]	4,300

FACOM 2014 ©