

DTSM-2 SERIES

12x12
Surface Mounting Type

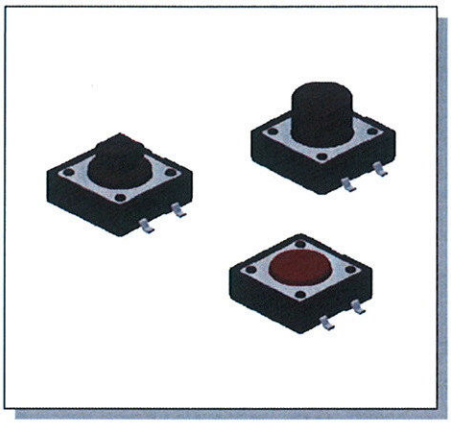

HOW TO ORDER

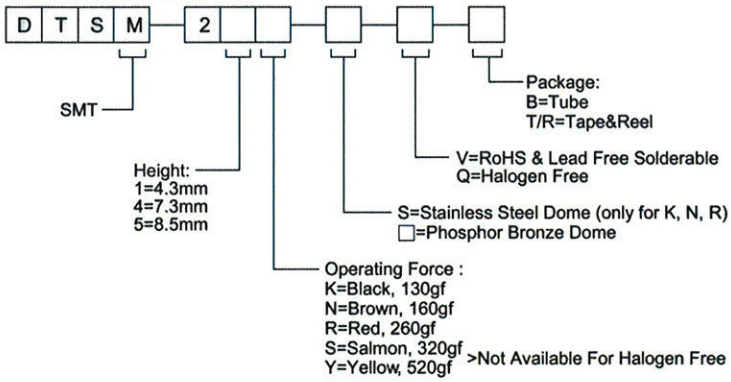

TACT SWITCH

SPECIFICATION

MECHANICAL

Operation Force: 520 ± 130gf Yellow(Y)
320 ± 80gf Salmon (S)
260 ± 50gf Red (R)
160 ± 50gf Brown (N)

Stroke: 0.35 ± 0.1mm

ENVIRONMENTAL

Operation Temperature: -25°C to +70°C
Storage Temperature: -30°C to +80°C


ELECTRICAL

Electrical Life:
*Phosphor Bronze Dome
100,000 cycles for 520gf, 320gf, 260gf
200,000 cycles for 160gf
*Stainless Steel Dome
300,000 cycles for 520gf, 320gf
500,000 cycles for 260gf
1,000,000 cycles for 100gf, 160gf
Rating: 50mA , 12VDC


PACKAGE

DTSM-2: 40 pcs/tube
DTSM-21: 700 pcs/reel
DTSM-24: 500 pcs/reel
DTSM-25: 400 pcs/reel


CIRCUIT




DTSM-21.25

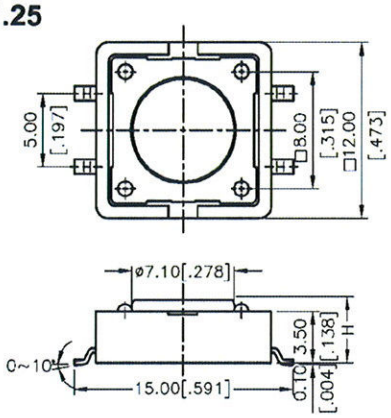


DTSM-25□	8.50[.335]
DTSM-21□	4.30[.169]
PROD. NO.	H




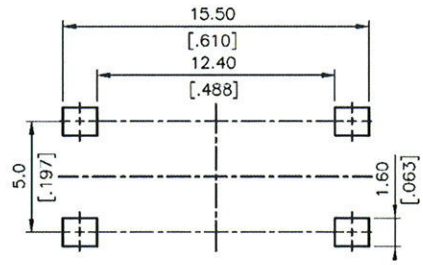


P.C.B LAYOUT

DTSM-24

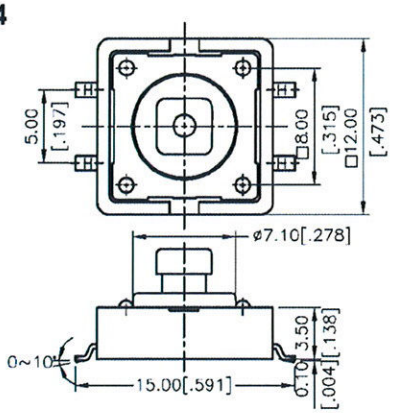



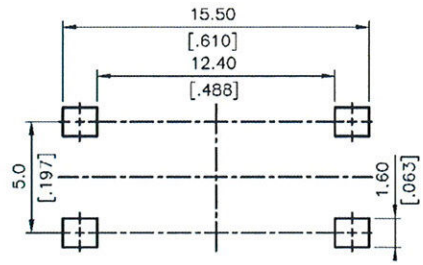

P.C.B LAYOUT