Datenblatt - Fiche technique - Data sheet

26.11.0337



ROLINE Kat.6a Keystone, ungeschirmt, werkzeuglos, weiss


ROLINE Keystone Cat.6a, non blindé, sans outil, blanc


ROLINE Keystone Jack, Cat. 6a, RJ-45, unshielded, toolless, white


Item no. 26.11.0337

ROLINE Cat. 6a Keystone Jack, RJ-45, UTP, white color





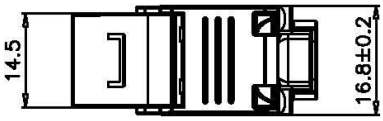

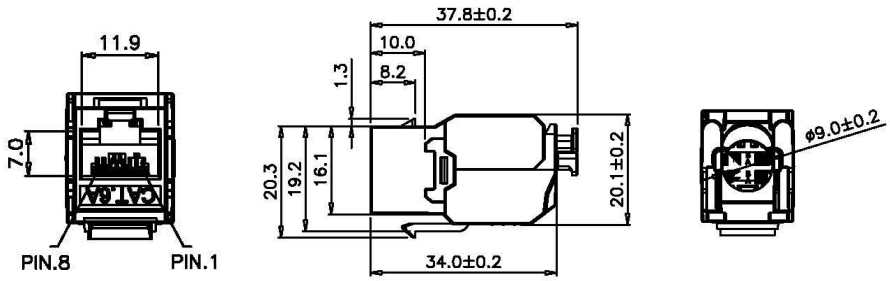

Specification :

Material :
1. RJ45 Jack :
   1−1. Housing : ABS+PC, UL 94−V0, White color.
   1−2. Contact Bracket : PC, UL 94−V2, Transparent color.
2. RJ45 Jack Contact :
   2−1. Material : Phosphor Bronze with Nickel plated.
   2−2. Finish : 50 micro−inch Gold plated on Plug contact area.
3. Cap A&B : PC+Fiber, Black color.
4. IDC :
   4−1. Housing : PC+Glass Fiber, Grey color(RAL7035), UL 94−V2.
   4−2. Terminal : Phosphor Bronze with Tin plated.
5. IDC Cap : PC+Glass Fiber, UL 94−V2, White color.
6. PCB : FR4, UL 94−V0.

Performance :
a. T568A & T568B wiring.
b. Insertion Force : 20N max. (IEC 60603−7−4).
c. Retention Strength : 7.7 kg between Jack and Plug.
d. Operating Temperature : −10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568B.2).
e. Life(mating cycles) :
   e−1. Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603−7−4.)
   e−2. IDC : Suitable for 23−26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tool.
   e−3. Tool−less : When using the IDC Cap for wire management.
f. The Cat.6A transmission performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard.