
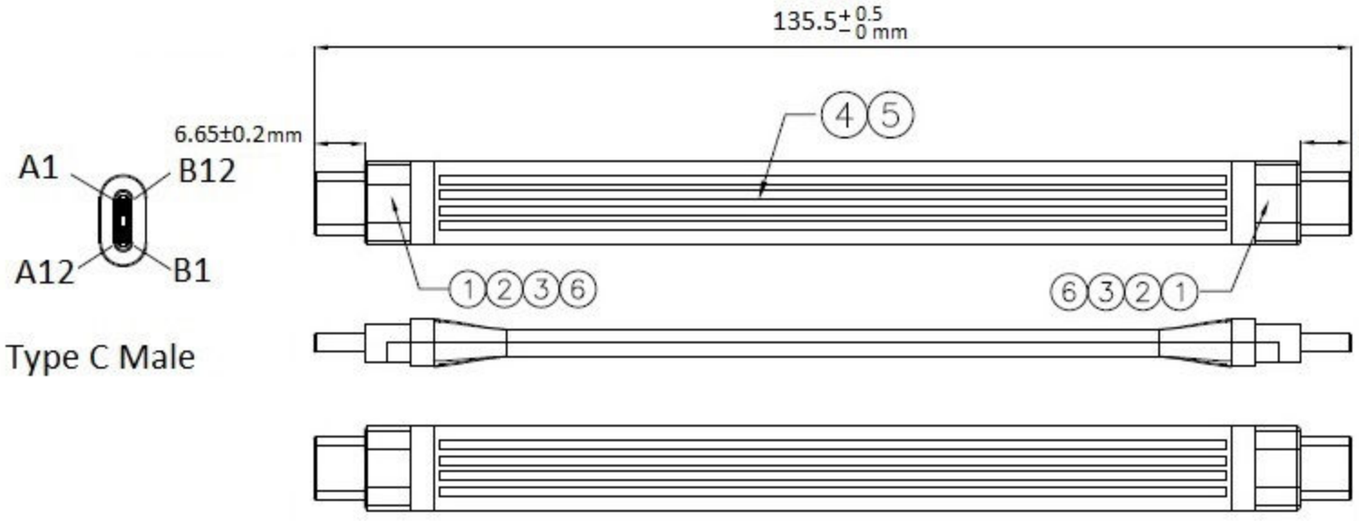


Pin Assignment:

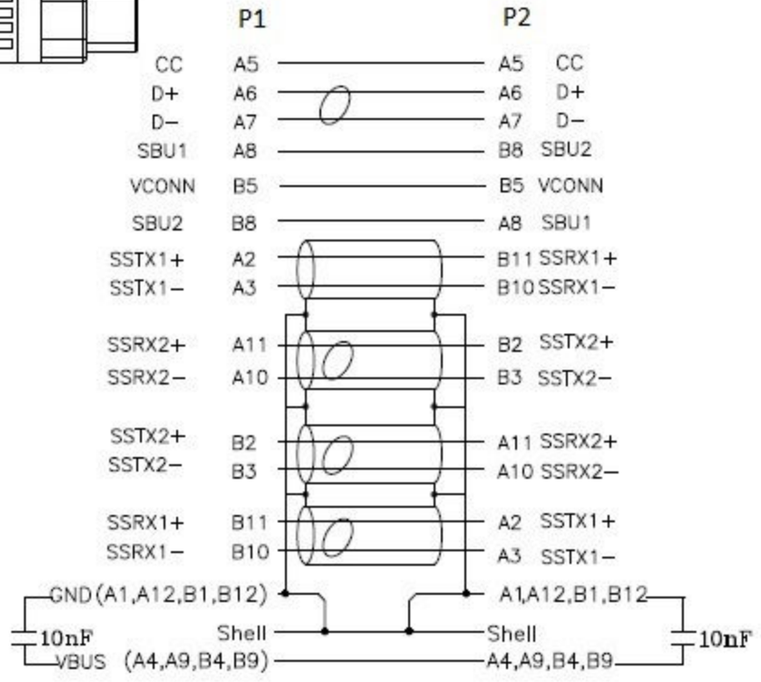

Electrical Test:

1. 100% Test (open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Speed: 10G

No.	Description	Q'TY	UNIT
6	Aluminum alloy shell Color: silver	2	PCS
5	Outside Molding 65A TPE Color: black	15	G
4	Outside Molding 88A TPE Color: black	4	G
3	Type C Metal Down Cap	1	PCS
2	Type C Metal Up Cap	1	PCS
1	USB 3.2 Type C to C ~ with FPC+SMT	1	PCS

Tolerance	inches	mm
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Drawn by	Shi Jie
Check by	
Appd by	

SECOMP

ROLINE USB 3.2 Gen 2 Flex. Cable CM/CM, PD 20V3A, black

Item No.	11.02.9054		
Scale	None	Drawing No.	REV. AO
Unit	mm		
Date	2020.05.25		1/1