Brand of NTN corporation

Technical data

UKFLE206H

Bearing units




Grey cast housing, radial insert ball bearing with adapter sleeve,seal with slinger. Deviation from figure: For some sizes, the bearing inserts may protrude beyond the mounting surface of the housing.

KIT CONTENT

UK206G2H, FLE206

VISUAL (S)

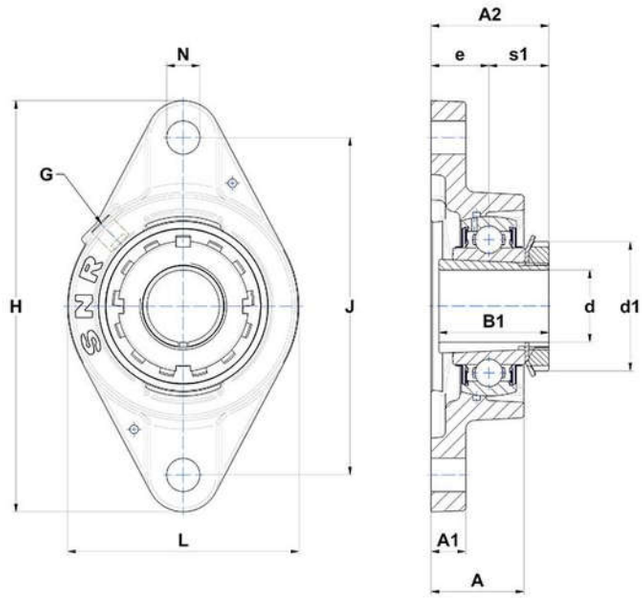

PRODUCT DEFINITION

Brand	SNR
A - Housing height	32,1 mm
A1 - Housing foot height / flange height	12 mm
A2 - Total height from mounting surface	40,5 mm
B - Width of Inner Ring	25 mm

UKFLE206H
Bearing units

PRODUCT DEFINITION	
B1 - Overall width Inner Ring	38 mm
d - Shaft diameter	25 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	45 mm
e - Distance mounting surface to bearing center	20 mm
G - Grease fitting	R1/8"
H - Housing length, width or diameter	142 mm
J - Mounting holes distance	116,5 mm
L - Housing width / diameter	80 mm
N - Mounting hole dimension	11,5 mm
s1 - Distance nut to middle of bearing raceway	20,5 mm

PRODUCT PERFORMANCE	
C - Dynamic load rating	19500000 mN
C0 - Static load rating	11200000 mN
Operating temperature min.	253,15 °K
Operating temperature max.	373,15 °K

OTHER FEATURES	
Mass	0,87 kg
Adapter sleeve designation	H2306