Laserliner®

MasterLevel Box Pro




Digital electronic spirit level in practical format – with Bluetooth interface

Rev.0917





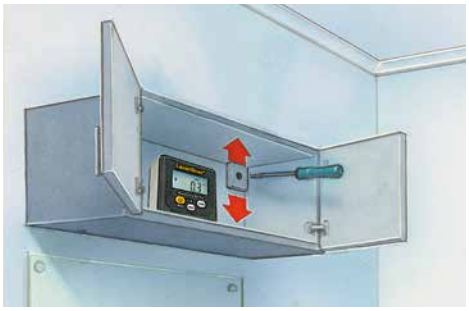

- **Reference function** for transferring angles
- **Bluetooth interface** for measurement data transfer
- **FlipDisplay:** the display automaticly turns when overhead measurements are involved. So the illuminated display is well readable under all conditions.
- **Calibration function** to recalibrate the sensor and increase the measuring accuracy
- **Hold function** to retain the current measured value on the display
- illuminated display
- strong magnets
- Compact in mini format

TECHNICAL DATA

MEASUREMENT PRECISION electronic slope ± 0,05° at 0° and 90° ± 0,1° at 1° ... 89°
DISPLAY ACCURACY 2 decimal places
OPERATING CONDITIONS 0 ... 50°C, 85%rH, no condensation, max. altitude 2000 m
STORAGE CONDITIONS -20 ... 70°C, 85%rH, no condensation
RADIO MODULE OPERATING DATA Bluetooth LE 4.x interface; Frequency band: ISM band 2400–2483.5 MHz, 40 channels; Transmission power: max. 10 mW; Bandwidth: 2 MHz; Bit rate: 1 Mbit/s; Modulation: GFSK/FHSS
POWER SUPPLY 1 x 1,5V (type AAA/LR03)
WEIGHT with battery 86 g
DIMENSIONS (W x H x D) 59 x 59 x 28 mm



Illuminated display


Magnetic


FlipDisplay



MasterLevel Box Pro
inclusive softbag
+ battery (1 x 1,5 V type AAA)

Packing dimension (W x H x D)
90 x 230 x 55 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
MasterLevel Box Pro	081.262A	4 021563 700233	2

magnetic · Bluetooth · Laserliner · 1 x AAA · SOFT

UMAREX GmbH & Co. KG · Donnerfeld 2 · 59757 Arnsberg · Germany · Tel. +49 2932 638-300 · Fax +49 2932 638-333 · info@laserliner.com · www.laserliner.com