
E12632

Ethernet connection cable

VSTGX080MSS0005K08STGP080--S

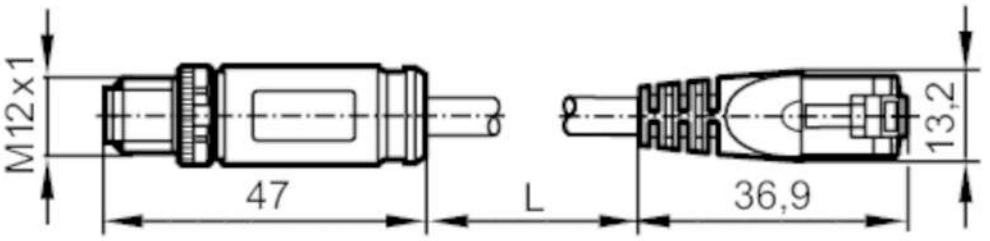

Application		
Special feature		Screened cable; Drag chain suitability
Design		Ethernet cable, X-coded
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 67; IP 20; (M12 plug / RJ45 plug)
Mechanical data		
Weight	[g]	231.9
Materials		PUR; PA
Moulded-body material		PA
Material nut		diecast zinc, nickel-plated
Drag chain suitability		yes
Drag chain suitability	bending radius for flexible use	min. 8 x cable diameter
	bending radius for fixed installation	min. 4 x cable diameter
	maximum permissible acceleration	4 m/s²
	travel speed	4 m/s
	bending cycles	> 1 Mio.
	torsional strain	± 180 °/m
Remarks		
Pack quantity		1 pcs.

E12632

Ethernet connection cable

VSTGX080MSS0005K08STGP080--S

Electrical connection - plug


Connector: 1 x M12, straight; coding: X; Moulded body: PA; Locking: diecast zinc, nickel-plated; Tightening torque: 0.5 Nm



Electrical connection

Cable: 5 m, PUR, green, Ø 6.2 mm, shielded; 8 x 0.14 mm²

Connection

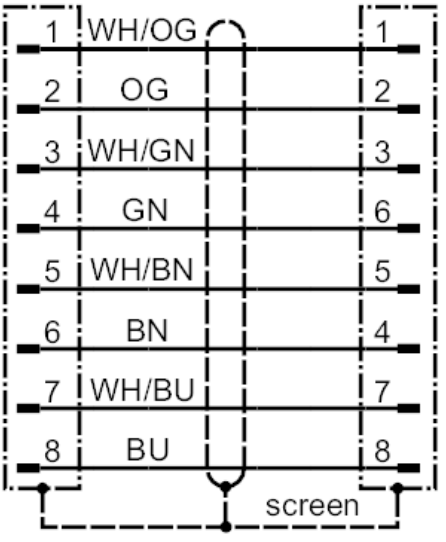

Electrical connection - plug

Connector: 1 x RJ45, straight; Moulded body: PA

