stay connected

# MIRO TR 24VDC SK OPTO-COUPLER MODULE


IN: 53 VDC - OUT: 48 VDC / 0,5 A - 1 C/O contact

Transistor 0.5 A
24 V DC
electr. NO/NC contact
Screw terminals


## Link to Product


**Illustration**

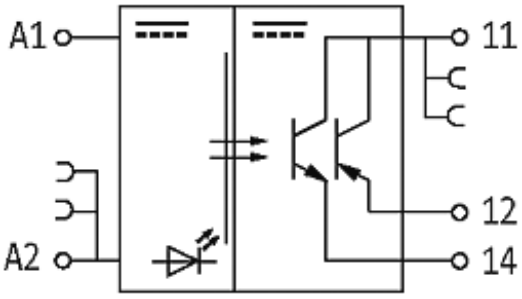


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

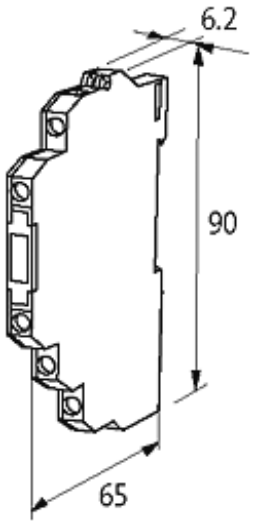


Product may differ from Image
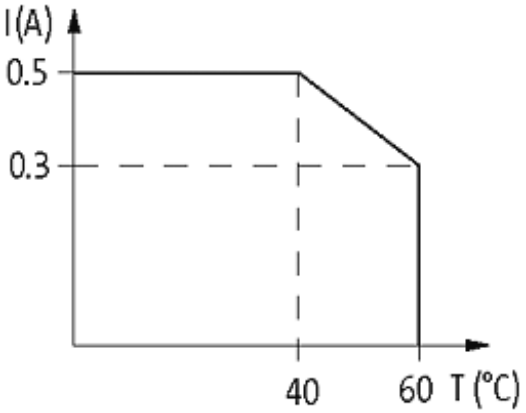
## Approvals

## Input

| | |
|---|---|
| Voltage range ON | 10...53 V DC |
| Voltage range OFF | 0...5 V DC |
| Control current | 6 mA |
| LED display | LED (yellow) |

## General data

| | |
|---|---|
| Test isolation voltage | 3.75 kV |
| Mounting method | DIN-rail mountable (EN 60715) |
| Housing | Black plastic, flame retardant |
| Temperature range | -20...+60 °C |
| Dimensions H × W × D | 90×6.2×65 mm |

## Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

| | |
|---|---|
| Switching voltage | 5...48 V DC |
| Switching current per output | 0.1 mA...0.5 A |
| Saturation voltage (across output) | max. 1.2 V DC |
| Leakage current (output is open) | max. 0.1 mA |
| Switching frequency | max. 10 Hz |
| Switching time ON/OFF | 40/150 µs |

**Commercial data**

| | |
|---|---|
| country of origin | CZ |
| customs tariff number | 85414090 |
| minimum order quantity | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16