DATASHEET - M30-FI3



Surface mounting enclosure, flat, 3 mounting locations, M30

Part no. M30-FI3
Catalog No. 197237

Technical data

General

Ambient temperature		
Open	°C	-25 - +70

Design verification as per IEC/EN 61439

Technical data for design verification		
Operating ambient temperature min.	°C	-25
Operating ambient temperature max.	°C	70

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Enclosure for control circuit devices (EC000200)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Housing for command and alarm devices (ecl@ss10.0.1-27-37-12-05 [AKF023014])

Number of command positions		3
Construction type housing		Surface mounting housing
Material housing		
Material quality housing		
Diameter openings	mm	30
Colour housing cover		
Degree of protection (IP)		
Degree of protection (NEMA)		
Width	mm	
Height	mm	
Depth	mm	

Dimensions

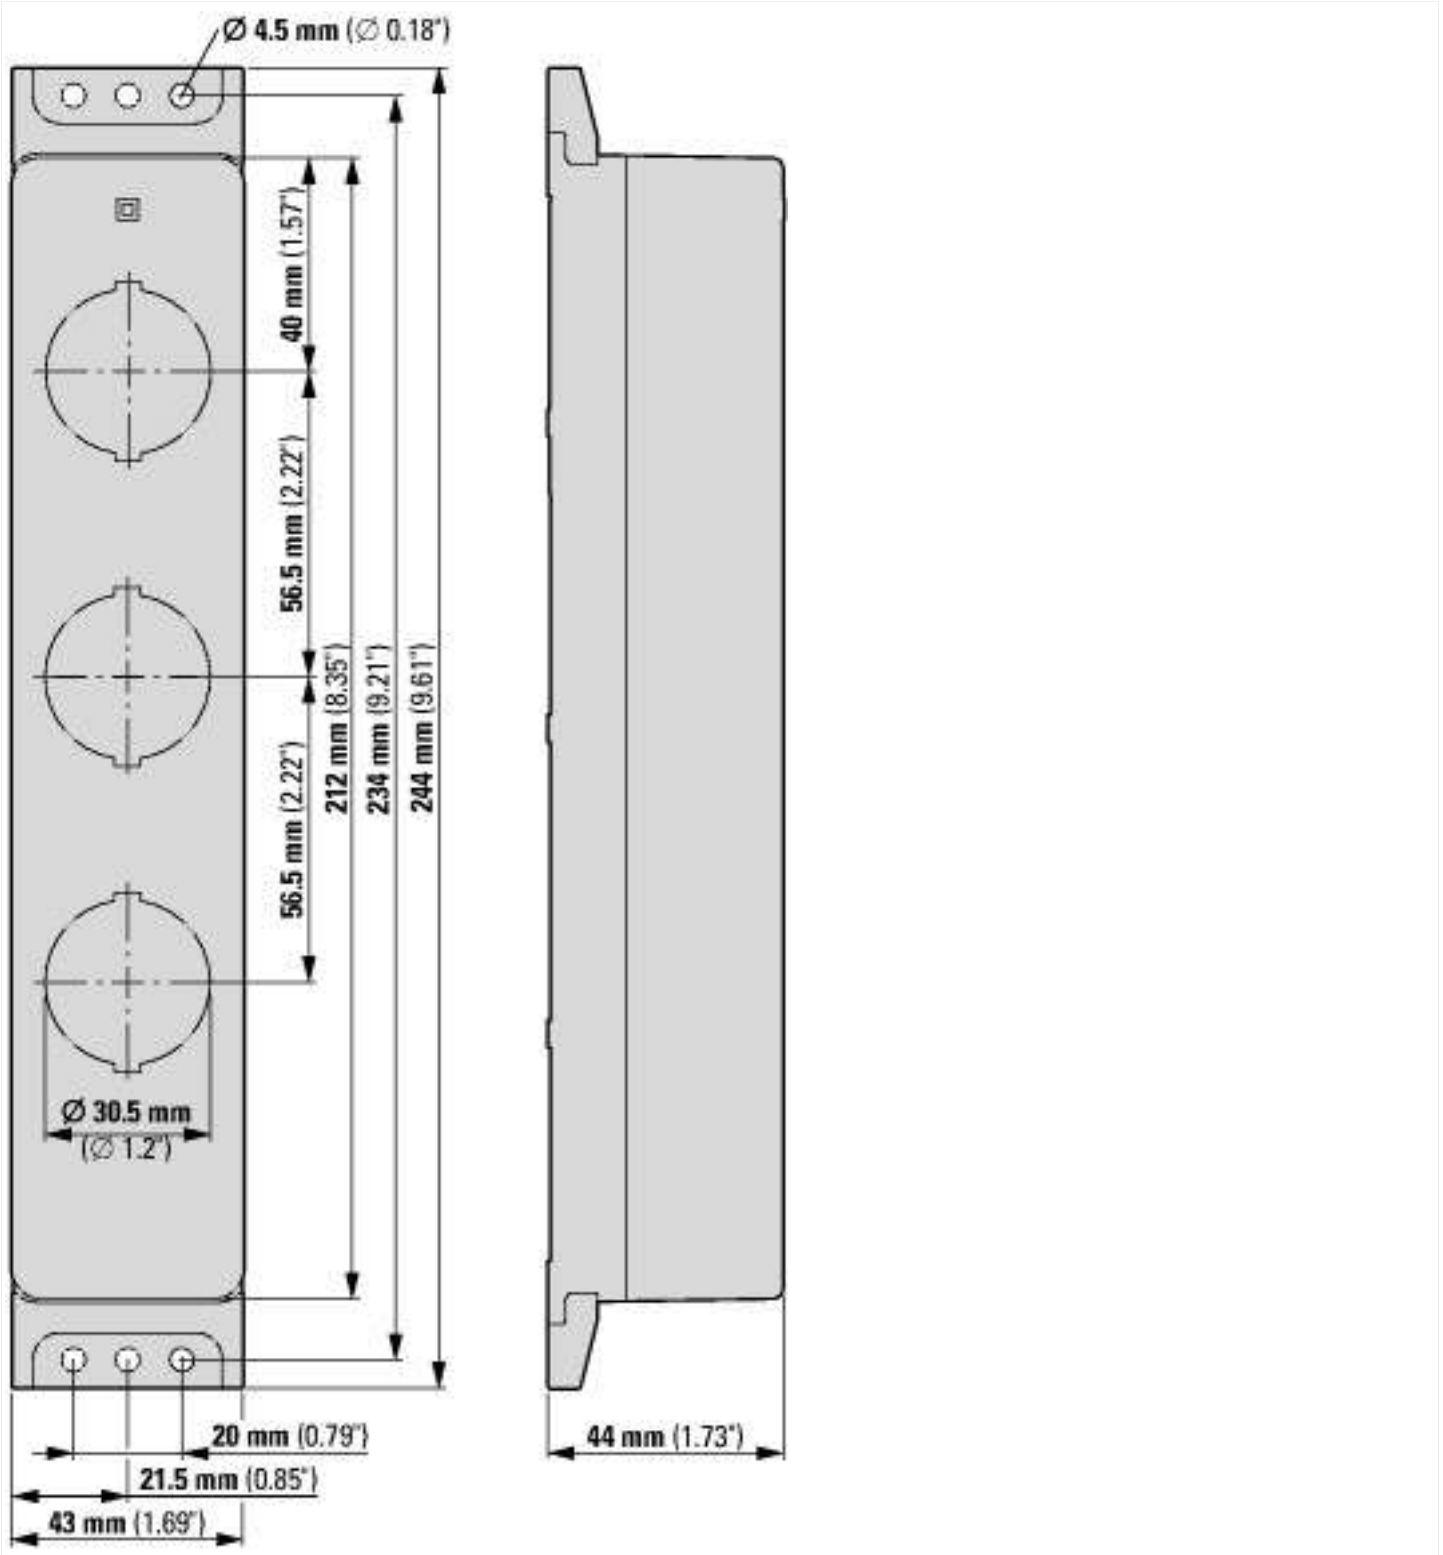
Ø 4.5 mm (∅ 0.18")
40 mm (1.57")
56.5 mm (2.22")
212 mm (8.35")
234 mm (9.21")
244 mm (9.61")
56.5 mm (2.22")
Ø 30.5 mm
(∅ 1.2")
20 mm (0.79")
21.5 mm (0.85")
43 mm (1.69")
44 mm (1.73")

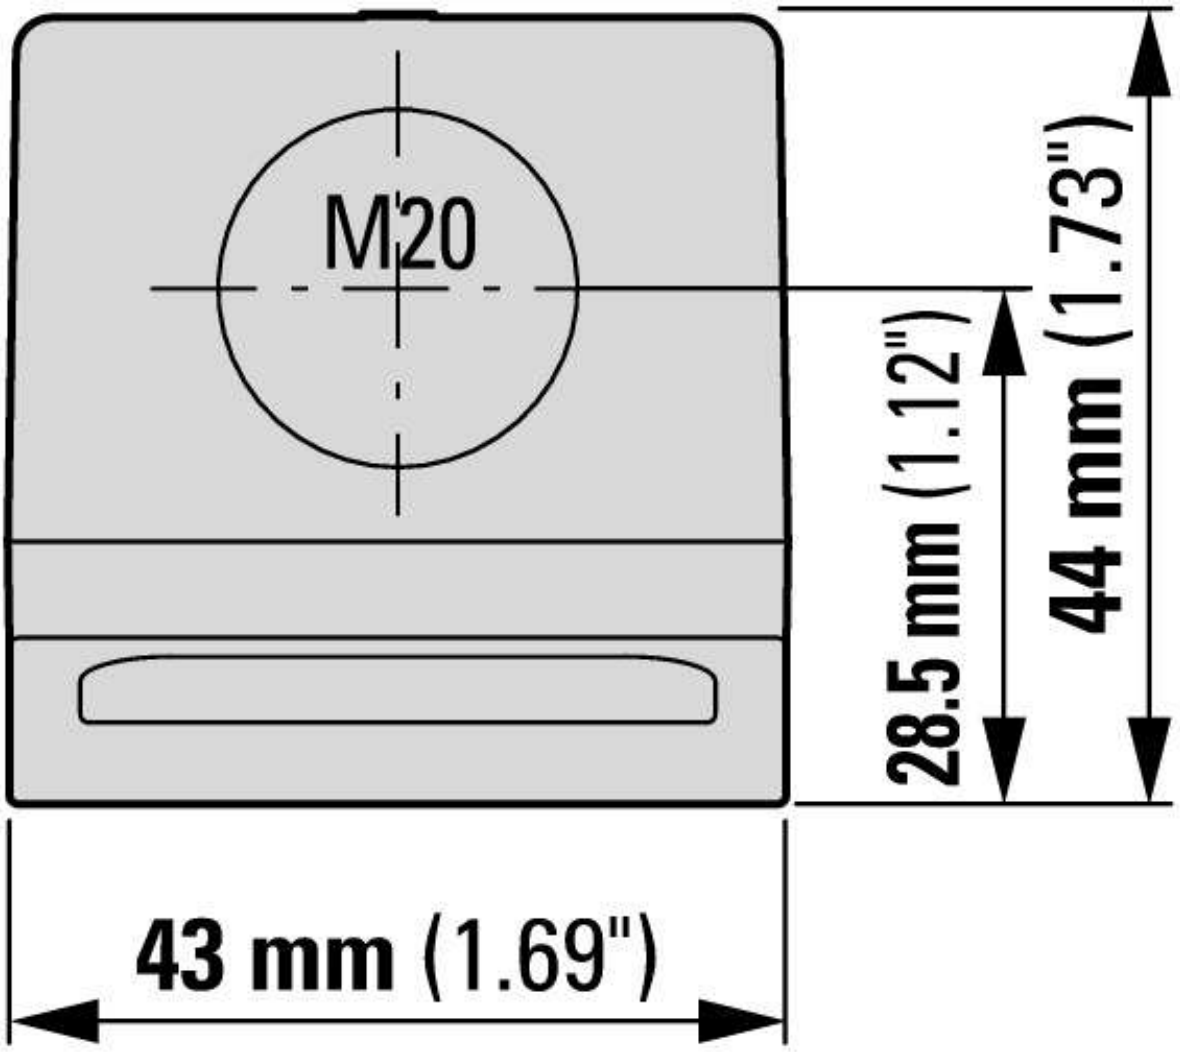

Eaton Industries GmbH
http://www.eaton.eu
© 11/2018 by Eaton Industries GmbH