
MJC19-5/4.5D-A

Ruland MJC19-5/4.5D-A, 5/4.5Dmm Jaw Coupling Hub, Aluminum, Clamp Style with D-Bore, 19.1mm OD, 9.8mm Length



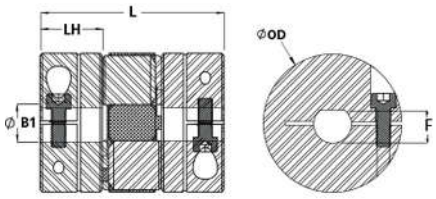

Description

Ruland MJC19-5/4.5D-A is a clamp d-bore zero-backlash jaw coupling hub with a 5/4.5D bore, 19.1mm OD, and 27.2mm legnth. The d-bore allows for positive drive in applications where the coupling can not slip. It is a component in a three-piece design consisiting of two aluminum hubs and an elastomeric insert called the spider creating a lightweight low inertia coupling capable of speeds up to 8,000 RPM. This three-piece design allows for a highly customizable coupling that easily combines clamp or set screw hubs with inch, metric, keyed, and keyless bores. Spiders are available in three durometers allowing the user to tailor the performance of the coupling to their application. Ruland jaw couplings have a balanced design for reduced vibration at high speeds. Hardware is metric and tests beyond DIN 912 12.9 standards for maximum torque capabilities. MJC19-5/4.5D-A is machined from bar stock that is sourced exclusively from North American mills and is RoHS3 and REACH compliant. It is manufactured in our Marlborough, MA factory under strict controls using proprietary processes.

Product Specifications

Bore (B1)	5/4.5D mm	**Flat (F)**	4.50 mm
Flat Tolerance	+.002”/-.000”	**B1 Max Shaft Penetration**	9.8 mm
Outer Diameter (OD)	0.750 in (19.1 mm)	**Bore Tolerance**	+0.03 mm / -0.00 mm
Hub Width (LH)	9.78 mm	**Length (L)**	1.070 in (27.2 mm)
Recommended Shaft Tolerance	+0.000 mm / -0.013 mm	**Forged Clamp Screw**	M2.5
Number of Screws	1 ea	**Screw Material**	Alloy Steel
Screw Finish	Black Oxide	**Hex Wrench Size**	2.0 mm
Seating Torque	1.21 Nm	**Torque Specifications**	Torque ratings vary with insert selection
Misalignment	Misalignment ratings vary with insert selection	**Maximum Speed**	8,000 RPM
Moment of Inertia	3.875 x 10^{-6} kg-m^2	**Full Bearing Support Required?**	Yes
Recommended Inserts	JD12/19-98R, JD12/19-92Y, JD12/19-85B	**Zero-Backlash?**	Yes
Balanced Design	Yes	**Fail Safe?**	Yes
Weight (lbs)	0.017166	**Temperature**	-10°F to 180°F (-23°C to 82°C)
Material Specification	2024-T351 Aluminum Bar	**Finish**	Bright
Finish Specification	Bright, No Plating	**Manufacturer**	Ruland Manufacturing
Recommended Gap Between Hubs	0.020 in (0.50 mm)	**Country of Origin**	USA
UPC	65432942046	**UNSPC**	31163011
Tariff Code	8483.60.8000		
Note 1	Stainless steel hubs are available upon request.		
Note 2	Performance ratings are for guidance only. The user must determine suitability for a particular application.		
Note 3	Torque ratings for the couplings are based on the physical limitations/failure point of the spiders. Under normal/typical conditions the hubs are capable of holding up to the nominal torque of the spiders. Please consult technical support for more assistance.		