
# OY079S

## Safety light curtain

OYA1360-50-2-12-P-1

For 8-pole sockets the core colours are not standardised.
Please note the wiring of the sensor and the sockets (see data sheet).

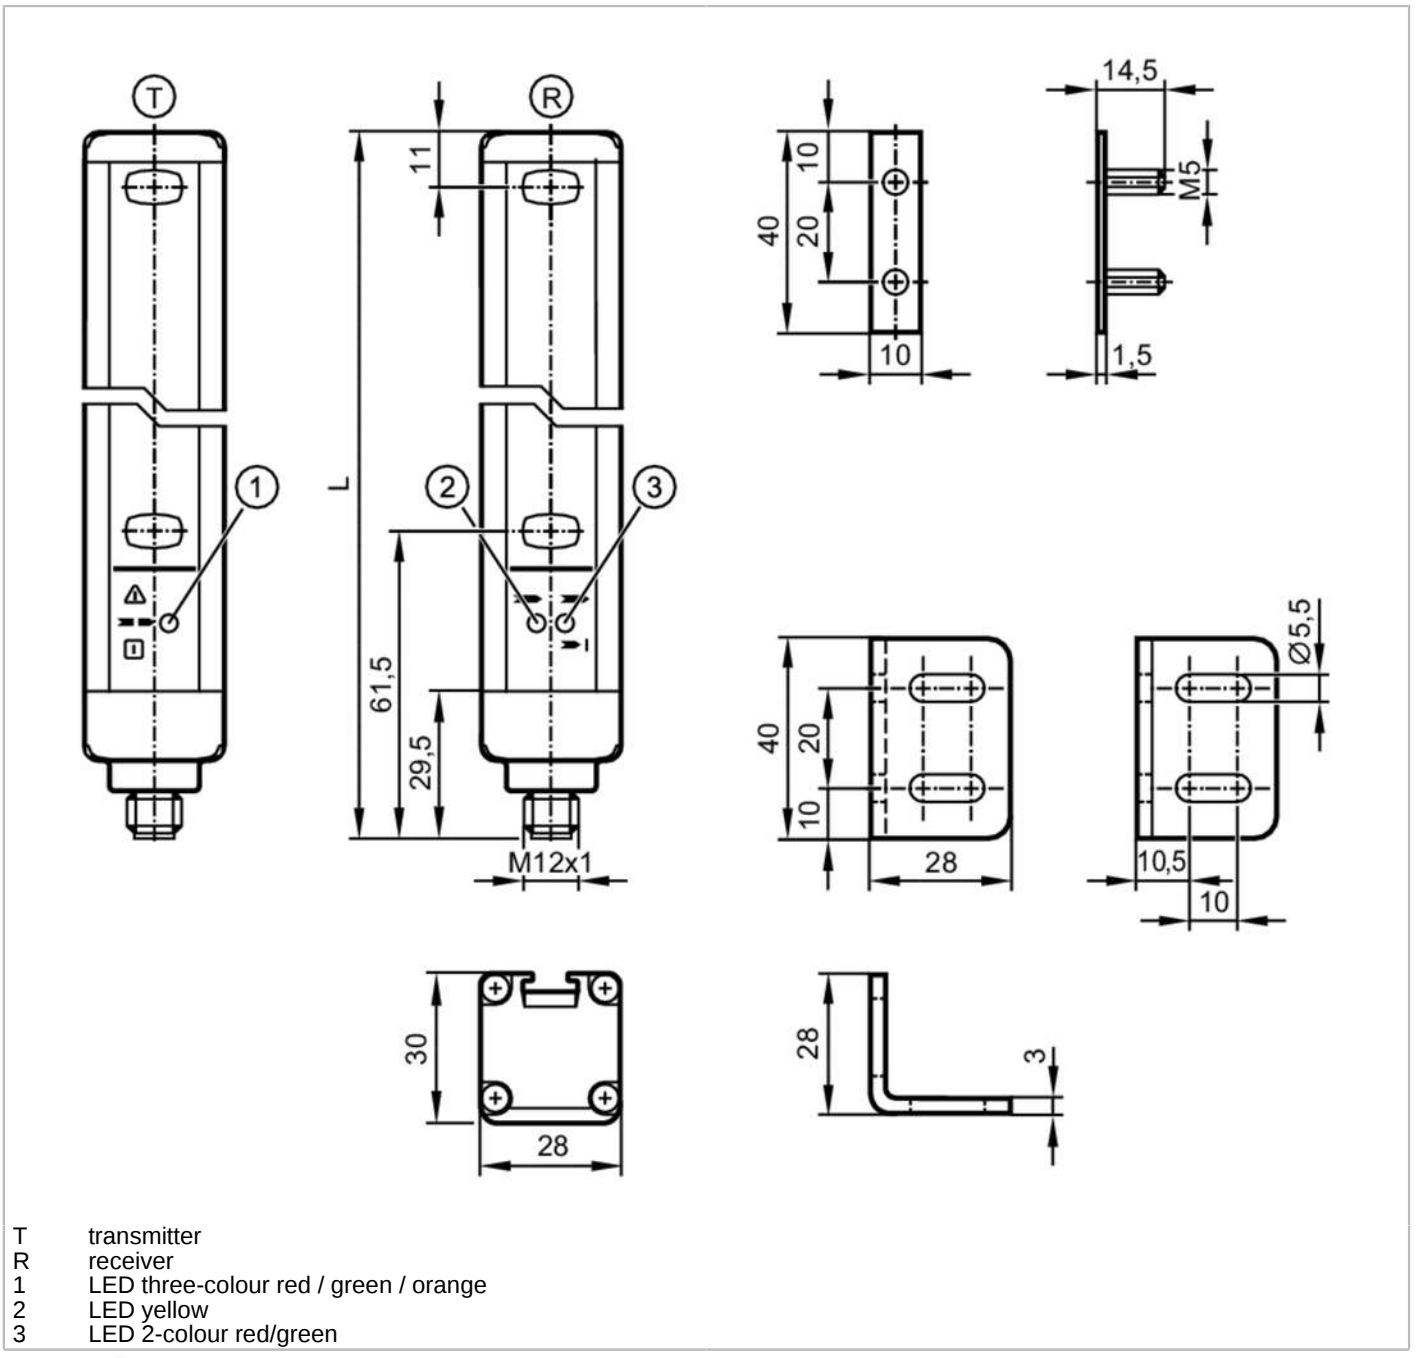


| | |
|---|---|
| T | transmitter |
| R | receiver |
| 1 | LED three-colour red / green / orange |
| 2 | LED yellow |
| 3 | LED 2-colour red/green |

| Product characteristics | |
|---|---|
| Type of light | infrared light |
| Electrical design | PNP |
| Protection | IP 65; IP 67 |
| **Application** | |
| Protective function | access prevention bodies or parts of bodies |

# OY079S

## Safety light curtain

OYA1360-50-2-12-P-1

| | | |
|---|---|---|
| **Electrical data** | | |
| Operating voltage tolerance | [%] | 20 |
| Operating voltage | [V] | 24 DC |
| Protection class | | III |
| Reverse polarity protection | | yes |
| Power-on delay time | [s] | < 2 |
| Type of light | | infrared light |
| Wave length | [nm] | 950 |
| Receiver | | |
| Current consumption | [mA] | 83 |
| Transmitter | | |
| Current consumption | [mA] | 42 |
| **Outputs** | | |
| Electrical design | | PNP |
| Number of OSSD outputs | | 2 |
| Max. current load per OSSD output | [mA] | 400;  (24 V) |
| Short-circuit protection | | yes |
| **Detection zone** | | |
| Protected area height | [mm] | 1360 |
| Resolution (detection capacity d) | [mm] | 50 |
| Protection area width (low light intensity) | [m] | 0...4 |
| Protection area width (high light intensity) | [m] | 3...12 |
| **Response times** | | |
| Response time | [ms] | 10.5 |
| **Operating conditions** | | |
| Applications | | class C to EN 60654-1 weatherproof application |
| Ambient temperature | [°C] | -10...55 |
| Storage temperature | [°C] | -20...70 |
| Max. relative air humidity | [%] | 95 |
| Protection | | IP 65; IP 67 |
| **Tests / approvals** | | |
| EMC | | IEC 61496-1 |
| Shock resistance | | IEC 61496-1 |
| Vibration resistance | | IEC 61496-1 |
| **Safety classification** | | |
| ESPE type (IEC 61496-1) | | 2 |
| Complies with the requirements | | ISO 13849-1: 2015 category 2, PL c |
| | | IEC 62061 SIL 1 |
| Mission time TM | [h] | 175200 |
| PFH | [1/h] | 4,6E-08 |

# OY079S

## Safety light curtain

OYA1360-50-2-12-P-1

| Mechanical data | | | |
|---|---|---|---|
| Weight | [g] | 4728 | |
| Dimensions | [mm] | 1413 x 28 x 30 | |
| Materials | | housing: aluminium; front pane: PC | |
| Length L | [mm] | 1413 | |

| Displays / operating elements | | |
|---|---|---|
| Display | transmitter | 1 x LED |
| | receiver | 2 x LED |

| Accessories | |
|---|---|
| Items supplied | mounting bracket: 6 |
| | slot nuts: 6 |
| | Nuts |


| Remarks | |
|---|---|
| Pack quantity | 1 pcs. |

**Electrical connection - receiver**

Connector: 1 x M12; coding: A; Maximum cable length: 100 m; for wire cross-section 0.34 mm²




Connection

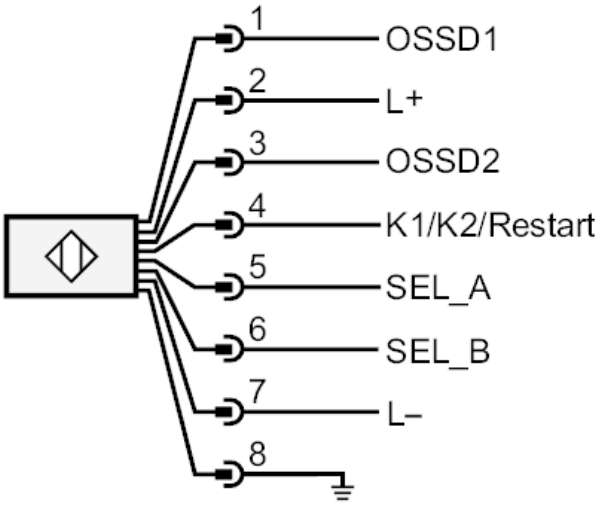


# OY079S

## Safety light curtain

OYA1360-50-2-12-P-1

### Electrical connection - transmitter

Connector: 1 x M12; coding: A




### Connection

