MOELLER

Type: **M22–WR4**
Article No.: **279419**



Ordering information			
Function:			45°
Design			With rotary head
Description			4 positions
Front ring			Front ring: titanium
Protection type			IP66

Function: Function



Button plate


Notes concerning the product group

Front ring gold–plated, → 274150

General			
Standards			IEC/EN 60947 VDE 0660
Lifespan, mechanical	Operations	× 10^6	> 0,1
Operating frequency	Operations/h		2000
Operating torque (screw terminals)		Nm	0,3

Degree of protection, IEC/EN 60529			IP66
Climatic proofing			Damp heat, constant, to IEC 60068–2–78 Damp heat, cyclic, to IEC 60068–2–30
Ambient temperature			
Open		°C	–25/70
Mounting position			As required
Mechanical shock resistance according to IEC 60068–2–27Shock duration 11 ms, half–sinusoidal		g	> 30
Dimensions			


Dimensions

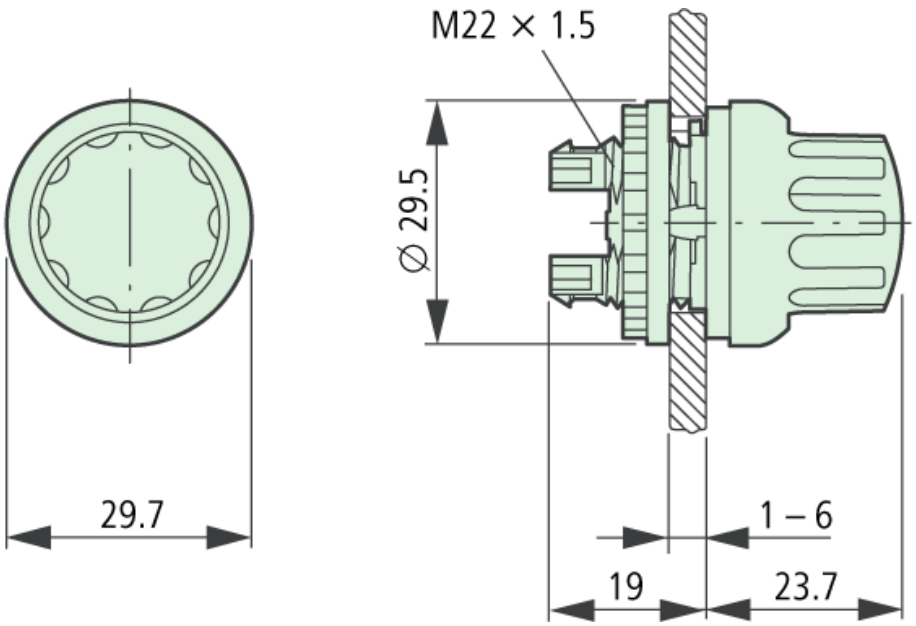

Moeller GmbH, Hein–Moeller–Str. 7–11, D–53115 Bonn
E–Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net
Copyright 2006 by Moeller GmbH. Subject to modifications. HPL–C2006GB–INT V2.3

MOELLER

Type: **M22−A**
Article No.: **216374**

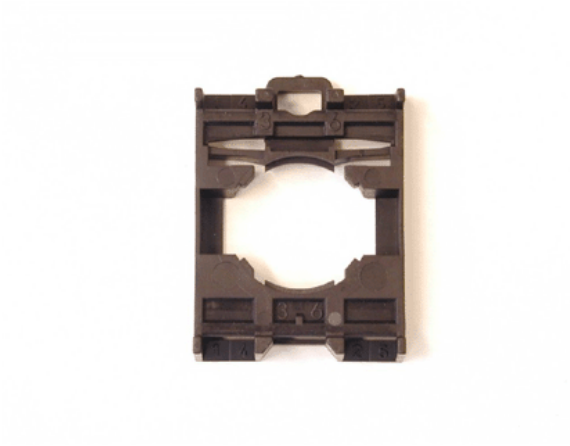

Moeller GmbH, Hein−Moeller−Str. 7−11, D−53115 Bonn
E−Mail: catalog@moeller.net, Internet: www.moeller.net, http://catalog.moeller.net
Copyright 2006 by Moeller GmbH. Subject to modifications. HPL−C2006GB−INT V2.3