HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

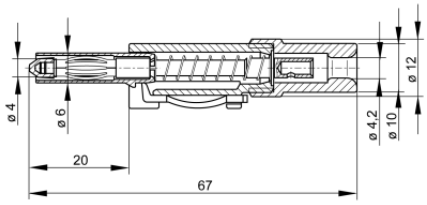
Plugs

4 mm sliding sleeve system

SLS 10 B



CE

Product	SLS 10 B
description	Touch protected plug to assemble with solder connection for cables up to 2.5mm². Insulated by latching and sprung insulating sleeve, to be released by pressure on the lateral locking spring. plug with contact spring, 4mm diameter.
operating instruction	BA414
article-no. / *colour	9318241xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 07 white Ni
drawing	
	
technical data	
connection	solder connection
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	POM
temperature range acc. To IEC61010(1)	-25 °C to +80 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

(1) contact the manufacturer for applications at deviating temperature ranges
(2) without rated measurement category, for other circuits that are not directly connected to mains

stand: 21.06.2022

stand: 21.06.2022