THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/16/12	D.GRIFFIN
B	ECN 7119: STAGGERED HOLE PATTERN, REVISED ROHS AND FORMAT	10/23/13	D.FRISIELLO

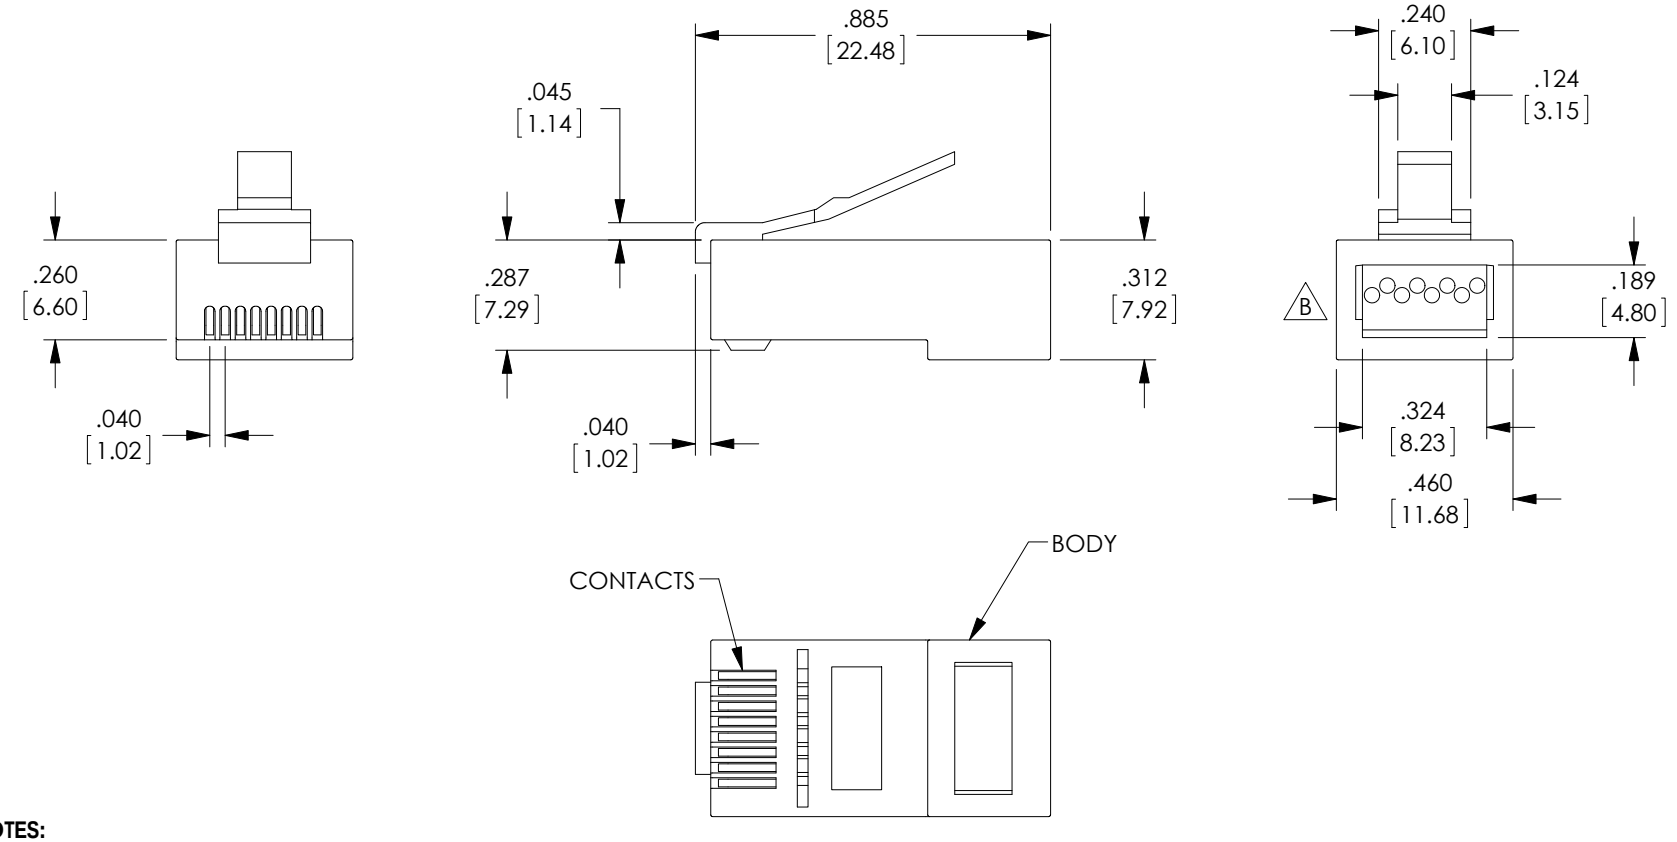

NOTES:

PLUG KITS CONSISTS OF: PRE-INSERTED PLUG BODY, (UNIBODY).

MATERIALS:
FRONT HOUSING PLASTIC: CLEAR POLYCARBONATE, UL94-V0
CONTACTS: PHOSPHOR BRONZE, 50µ GOLD PLATING.

CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94mm] TO .042 [1.07mm] OUTSIDE DIAMETER OF INSULATION.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE PACKAGED IN QUANTITY OF 50, IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

B

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS		DATE
DRAWN BY	D.FRISIELLO	8/16/12
CHECKED BY	D.DESJARDIN	8/16/12
APPROVED BY	D.GALLAGHER	8/16/12

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
TELECOM/MODULAR

PRODUCT DESCRIPTION
PLUG RJ45(8X8) CAT5E UNSHLD 50PK

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	TSP4088C5	B

SCALE: NONE | CAD FILE: TSP4088C5.SLDDRW | SHEET 1 OF 1