HIRSCHMANN® Test & Measurement
A BRAND OF SKS

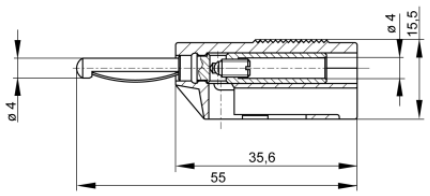
SKS Kontakttechnik GmbH

Plugs

VSB 20



CE

Product	VSB 20
description	Fully mating connector with cable gland and 4 mm socket for onward connection capability. Screw connection up to maximum cable cross-section of 2.5 mm² and external diameter of 4 mm. Nickel-plated brass contact material.
operating instruction	BA411
article-no. / *colour	9304351xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 06 gray · 07 white Ni
drawing	
	
technical data	
connection	screw terminal
rated voltage	30 VAC / 60 VDC
rated current (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	PP
temperature range acc. To IEC61010[(1)]	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

4 mm system

[(1)] contact the manufacturer for applications at deviating temperature ranges
stand: 01.06.2023

stand: 01.06.2023