Pomona®

Model 2451
BNC Female Panel Receptacle

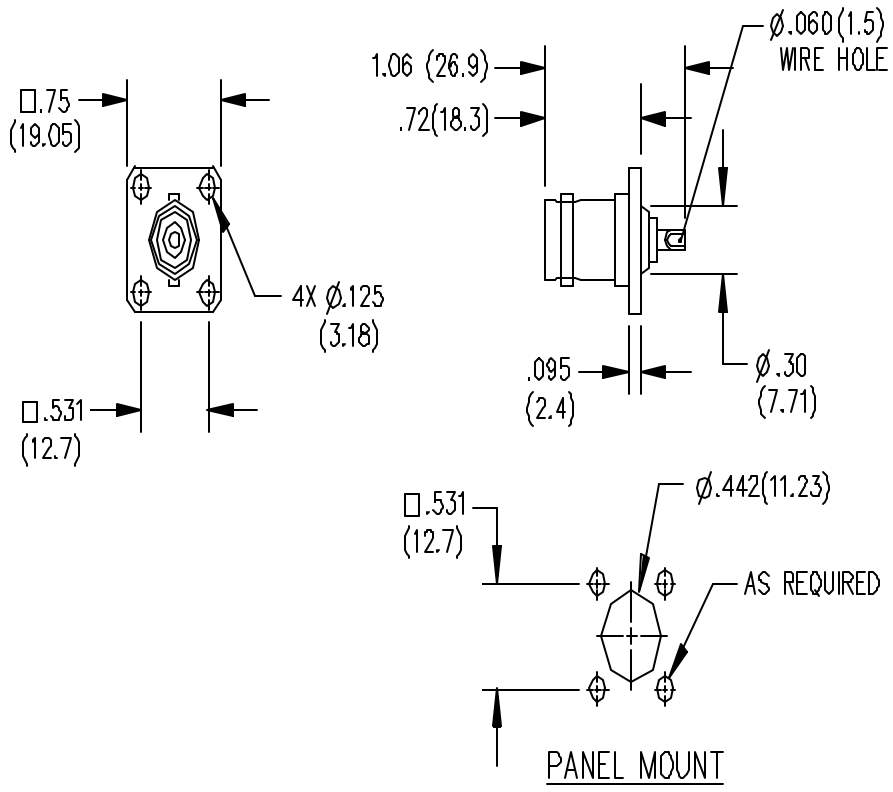

MATERIALS:
Body and Fittings: Brass, Tarnish Resistant Plating
Center Contact: Gold Plated Beryllium Copper
Dielectric: PTFE
Finish: Body and Fittings: Tarnish Resistant
Center Contact: Gold Plated

RATING:
Nominal Impedance: 50 Ohms
Operating Temperature: -65ºC to +165ºC

ORDERING INFORMATION: Model 2451

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 909-469-2900 Fax: 909-629-3317
Technical Assistance: 800-241-2060