
ENGLISH

Datasheet

2.00mm SIL Crimp Socket Housing

RS Stock number 842-719

Dimensions - mm

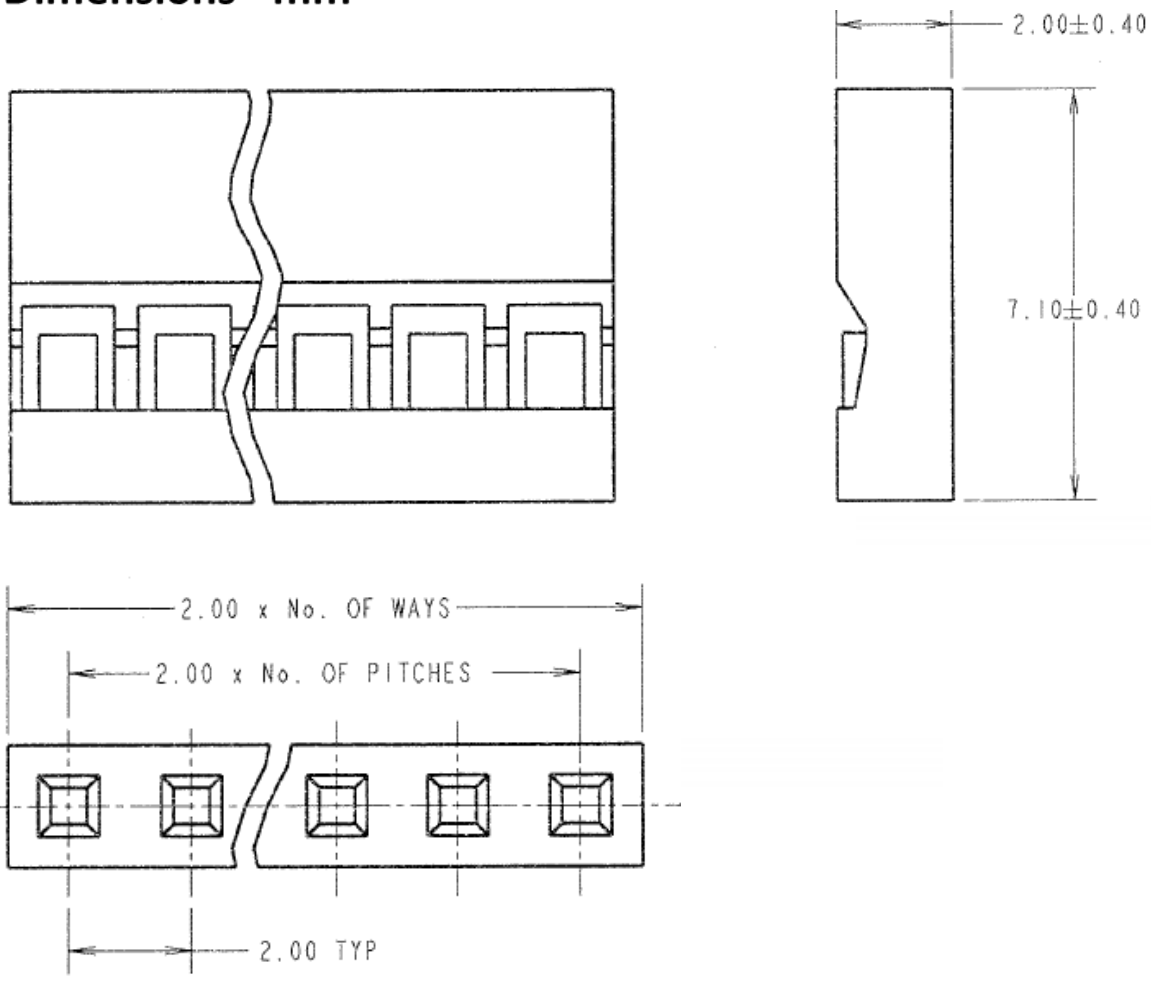

Specifications:

Moulding:	Nylon 66 UL94V-2, Black
Current Rating:	2A
Contact Resistance (initial):	10 milliohms max.
Contact Resistance (after conditioning):	20 milliohms max.
Insulation Resistance:	5000 megohms min.
Operating Temperature:	-40°C to 105°C

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.