# E12557

## Connection cable

VDOGS040PLS0002H04DOGS040PLS

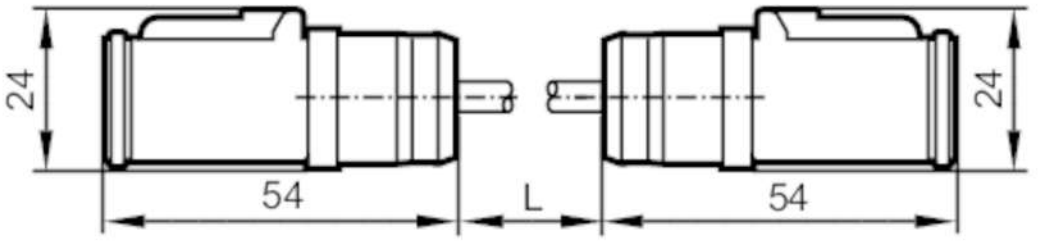


CE

| | | |
|---|---|---|
| **Application** | | |
| Special feature | | Free from silicone; Halogen-free |
| Free from silicone | | yes |
| **Electrical data** | | |
| Operating voltage | [V] | 12...24 DC |
| Protection class | | III |
| Max. current load total | [A] | 4 |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -40...85 |
| Ambient temperature (moving) | [°C] | -30...70 |
| Protection | | IP 67;  (mating connector plugged in) |
| **Mechanical data** | | |
| Weight | [g] | 173.7 |
| Moulded-body material | | PA |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |

# E12557

## Connection cable

VDOGS040PLS0002H04DOGS040PLS

### Electrical connection

Cable: 2 m, PUR, Halogen-free, lilac, Ø 6.4 mm; twisted; 2 x 0.50 mm² (28 x 0.15 mm ) + 2 x 1 mm² (52 x 0.15 mm )

### Electrical connection - socket

Connector: 2 x DEUTSCH connector, straight; Moulded body: PA; Contacts: nickel-plated




### Connection

