
E33434

Mounting adapter for process sensors

ADAPT IFM-TANK SPUD AV

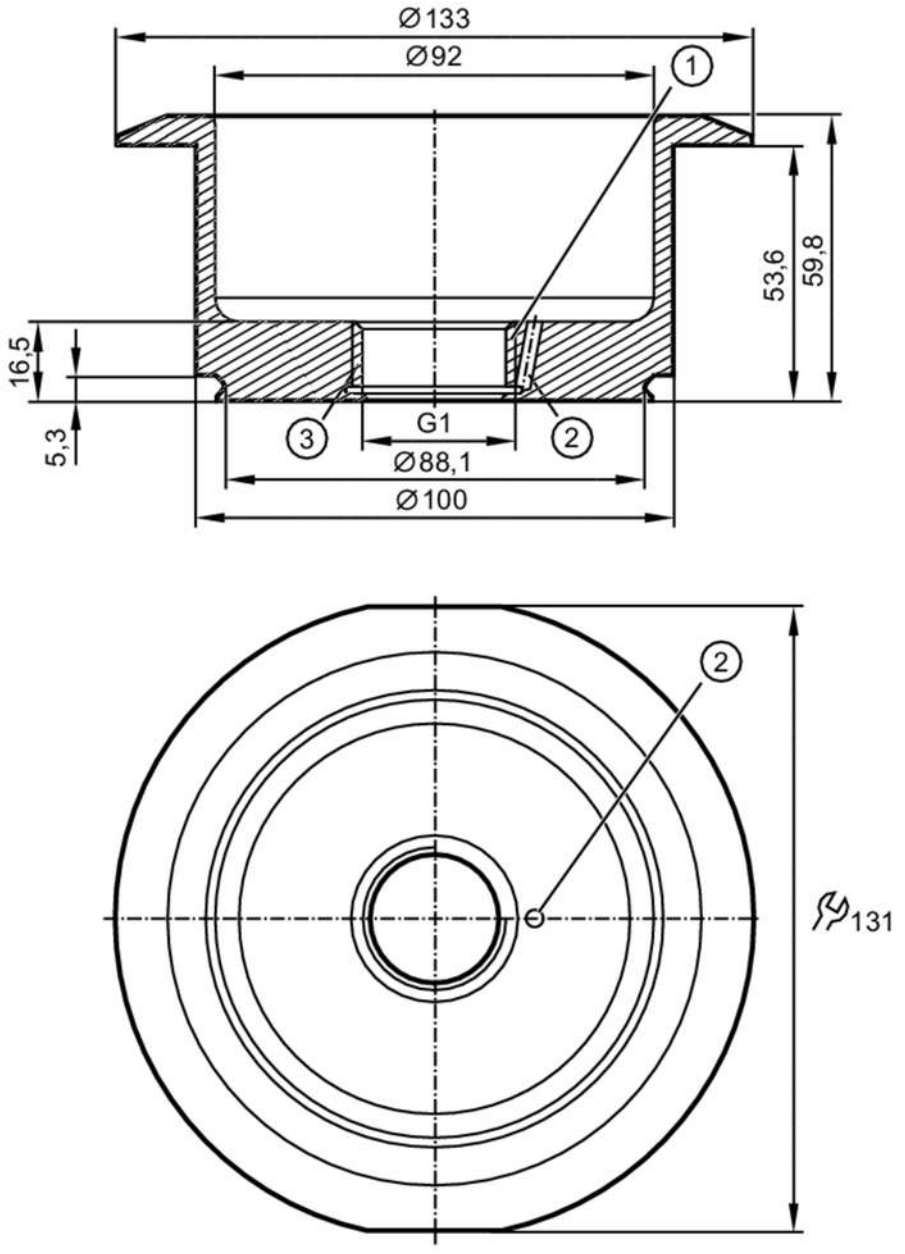

1 Aseptoflex Vario
2 Leakage port
3 sealing area

3-A EC 1935/2004 FDA

Application		
Design		accessories for, PY200x, PM17xx, PI27xx, PG27xx, : Rosemount 1199 (SSW) Tank Spud Seal
Pressure rating	[bar]	34
Tests / approvals		
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.
Pressure Equipment Directive EAC		The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.

E33434

Mounting adapter for process sensors

ADAPT IFM-TANK SPUD AV

Safety instructions		The compatibility between medium and product material has to be checked in all applications.
Mechanical data		
Weight	[g]	1602
Materials (wetted parts)		stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / Rz 4; O-rings: EPDM
Sensor connection		G 1 Aseptoflex Vario
Process connection		Tank Spud Rosemount 1199 (SSW) Tank Spud Seal
Sealing		Gasket
Hygienic equipment class to DIN 11866		H4
Accessories		
Items supplied		O-ring: 1 x 24 x 2, EPDM, FDA compliant, E30054
Accessories (optional)		O-ring: 24 x 2, FKM, FDA compliant, E30123
		sealing ring:, PEEK, FDA compliant, E30124
Remarks		
Pack quantity		1 pcs.