

PZ8 ❺

For R15 - 2 CO

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715
or on panel mounting
68,2 x 38 x 24,2 mm
Two poles
10 A, 250 V AC



Connection diagram




Accessories



PZ11 0031

Dimensions

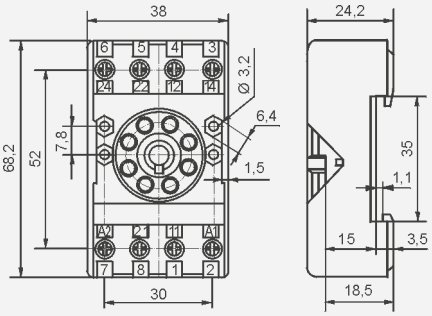


GZU8

For R15 - 2 CO

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715
82 x 35,5 x 25,7 mm
Two poles
10 A, 300 V AC



Connection diagram




Accessories




GZU 1052

Adaptor



Dimensions

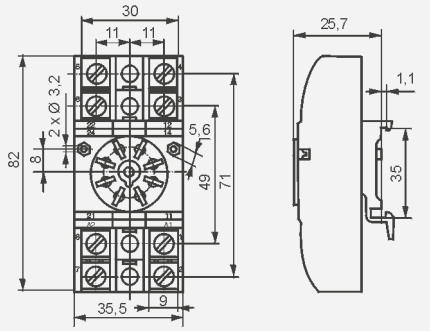


GZ8

For R15 - 2 CO

Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
On panel mounting
82,8 x 35,5 x 22,5 mm
Two poles
10 A, 300 V AC



Connection diagram




Accessories




GZ 1050

Mounting dimensions



Dimensions

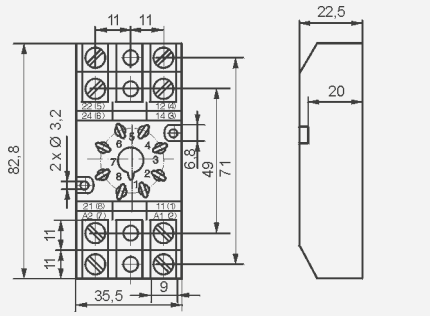


GZP8

For R15 - 2 CO

Screw terminals
Max. tightening moment
for the terminal: 0,5 Nm
35 mm rail mount
acc. to PN-EN 60715
or on panel mounting
73 x 38,2 x 27,2 mm
Two poles
12 A, 300 V AC



Connection diagram



Accessories



GZP-0054




Time module COM3



GZP-0035

Dimensions

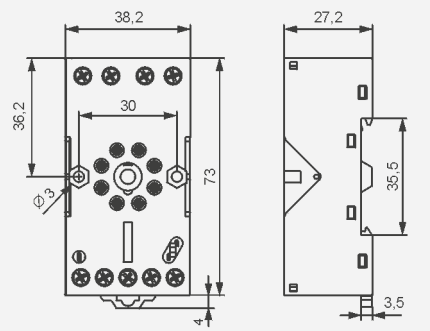

❺ Have obtained LR Type Approval Certificate (Lloyd's Register).

19.04.2016

Export Sales Department phone +48 68 47 90 832, 951 • e-mail: export@relpol.com.pl