HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS® SKS Kontakttechnik GmbH

## Test probes

# MPS 1



CE

| Product | MPS 1 |
|---|---|
| description | … |
| operating instruction | BA209 |
| article-no. / *colour | 9735311xx<br>00 black<br>01 red<br>Ni |
| **drawing** | |
| | 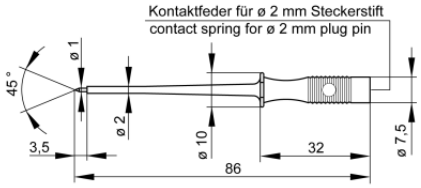 |
| **technical data** | |
| connection | spring loaded socket 2 mm |
| rated voltage(1) | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O (3) |
| rated current(1) (consider derating curve) | 1 A |
| material socket | brass, nickel plated |
| housing material | PE |
| temperature range acc. To IEC61010(2) | -25 °C to +60 °C |
| standard | IEC 61010 |

2 mm system

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 19.06.2019