RoHS Compliant

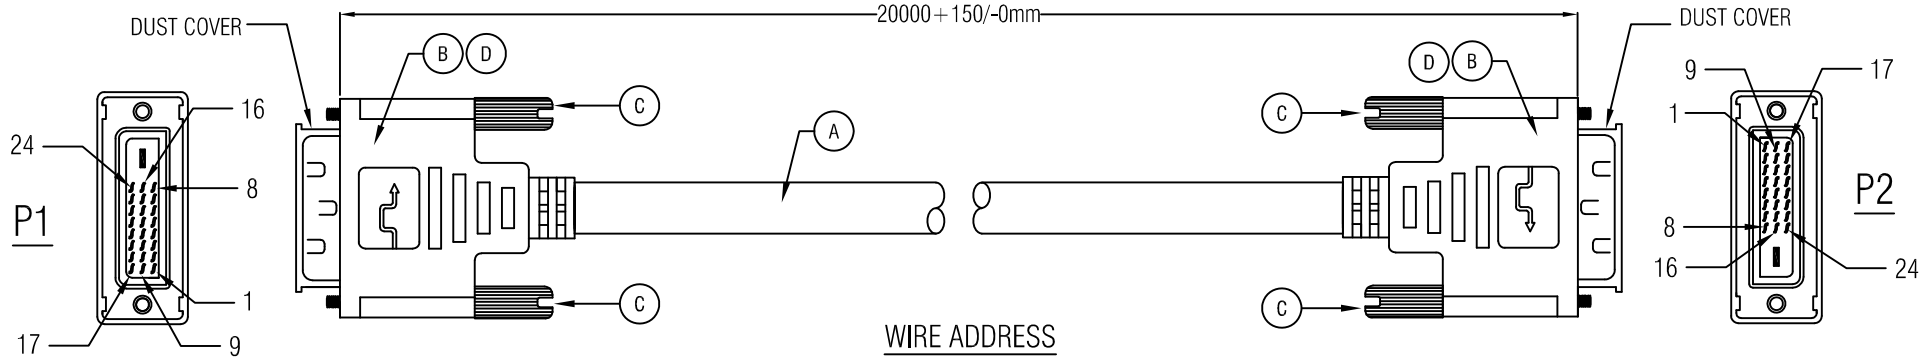

WIRE ADDRESS

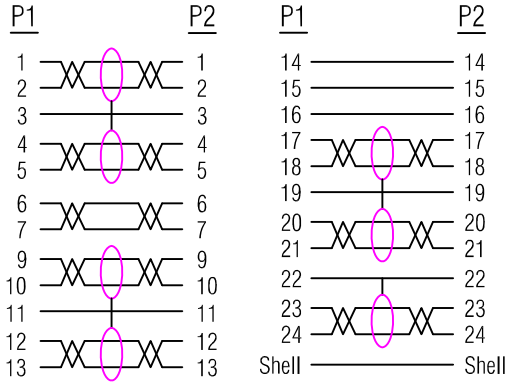

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:10Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.
5.Real Test Passed 1920*1080P 60Hz.
6.Real Test Not Twinkling,Double Vision and Decolor.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
D	45P PVC BLACK		G
C	#4-40UNC Φ2.3*48mm BLACK INSULATOR	4	PCS
B	DVI24+1P MALE(Black Insulator,Nickel Plated)	2	PCS
A	UL20276,(24#*1P+D+FAM)*7PCS+24#*1P+24#*3C,AL+MYLAR+B,OD=12mm BLACK PVC JACKET.	1	PCS

ROLINE DVI Dual Link (24+1)Cable, 20m, black

Item	11.04.5599	
Draw	Kobe	Date: 2015.11.18
Approval		
Maker	F16	
Sample NO.		

SECOMP

Drawings of 1 (1) | Proportion: 1:1 | Unit(mm) | A4