HIRSCHMANN® Test & Measurement
A BRAND OF SKS

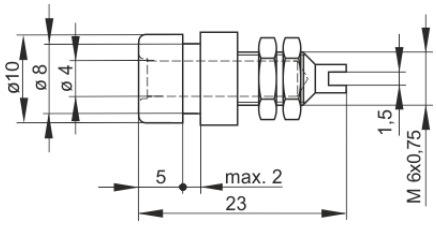
SKS Kontakttechnik GmbH

Sockets

BIL 20 Au



CE

Product	BIL 20 Au
description	Socket with insulated head and ring for installation in equipment chassis and switchpanels with a wall thickness up to 2 mm. 4 mm diameter gold-plated zinc die-cast socket, with solder connection.
operating instruction	BA403
article-no. / *colour	9301767xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 05 brown · 06 gray · 07 white · 09 violet Au
drawing	
	
technical data	
connection	M6 thread, solder connection
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	32 A
material socket	SKS_ZINKDRUCKGUSS-VERZINNT
housing material	PA
temperature range acc. To IEC61010(1)	-25 °C to +85 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

(1) contact the manufacturer for applications at deviating temperature ranges
(2) without rated measurement category, for other circuits that are not directly connected to mains
stand: 24.08.2022

stand: 24.08.2022

4 mm system