




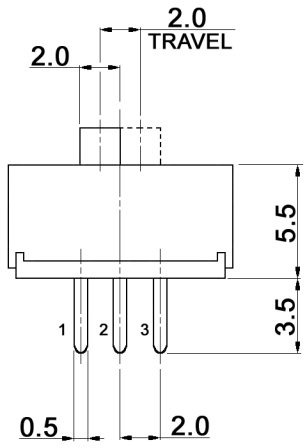


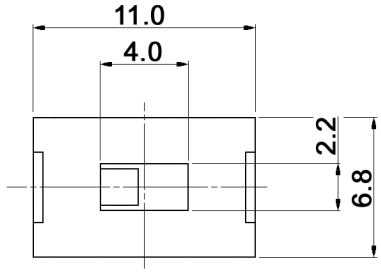

P.C. LAYOUT



SWITCHING DIAGRAM



non-shorting

Specifications:

Contact rating:	0.3A, 125V AC
Contact resistance:	20mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V AC
Mechanical life:	10 000 cycles
Operating force:	150 +/-100gf
Material:	Frame: POM
	Slider: PPE+PS
	Base: PBT
	Terminal: brass, silver plated
	Contact: phosphor bronze, silver plated

RoHS-conform 2002/95/EC

Tolerances: ±0.2mm			Date	Name	MFP 261 N
			12/13	dr	
			knitter-switch	30 29 82	Page 1/1
Modifications	Date	Name			