178 MICROSWITCHES
182 TACTILE SWITCHES
186 22MM CONTROL SWITCHES
191 FOOT SWITCHES
193 LIMIT SWITCHES
203 PIEZO SWITCHES AND KEYPADS

Piezo switches, point illuminated

Product overview

Aluminium piezo switches offering rugged, sealed tamper and vandal resistant solid state switching. Exceptional durability and reliability.

- Red/green spot illumination
- 28mm diameter actuator
- 22.5mm diameter mounting hole (PG16)
- Normally open, momentary action
- Make impulse time of 125-300 msec
- Choice of flat and recessed actuator
- Wire termination
- IP68 sealed











SPECIFICATION	
Operating voltage	1-24V AC/DC
Switching current	0.2A max
Actuation force	3-5N
Operating temperature	20°C to +70°C
Ingress protection	IP68
Lifetime 'ON' resistance 'OFF' resistance	50 million operations <20Ω >5mΩ

PART NO.	TYPE
CPS22IF-ALNA-24RG	Flush
CPS2IR-ALNA-24RG	Recessed

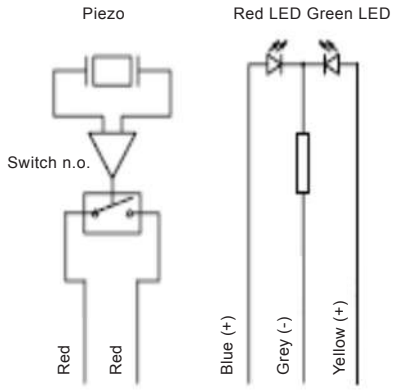

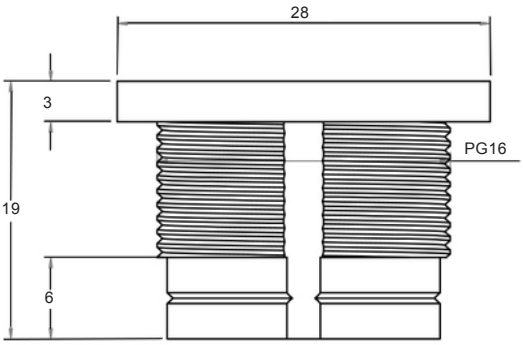

KEY FEATURES

22mm mounting diameter | Point illuminated | IP68 ingress protection