


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	H	ECO-13226: REVISED MODEL AND DIMENSIONS	01/12/2024	DFRISIELLO	GUTTADAURO

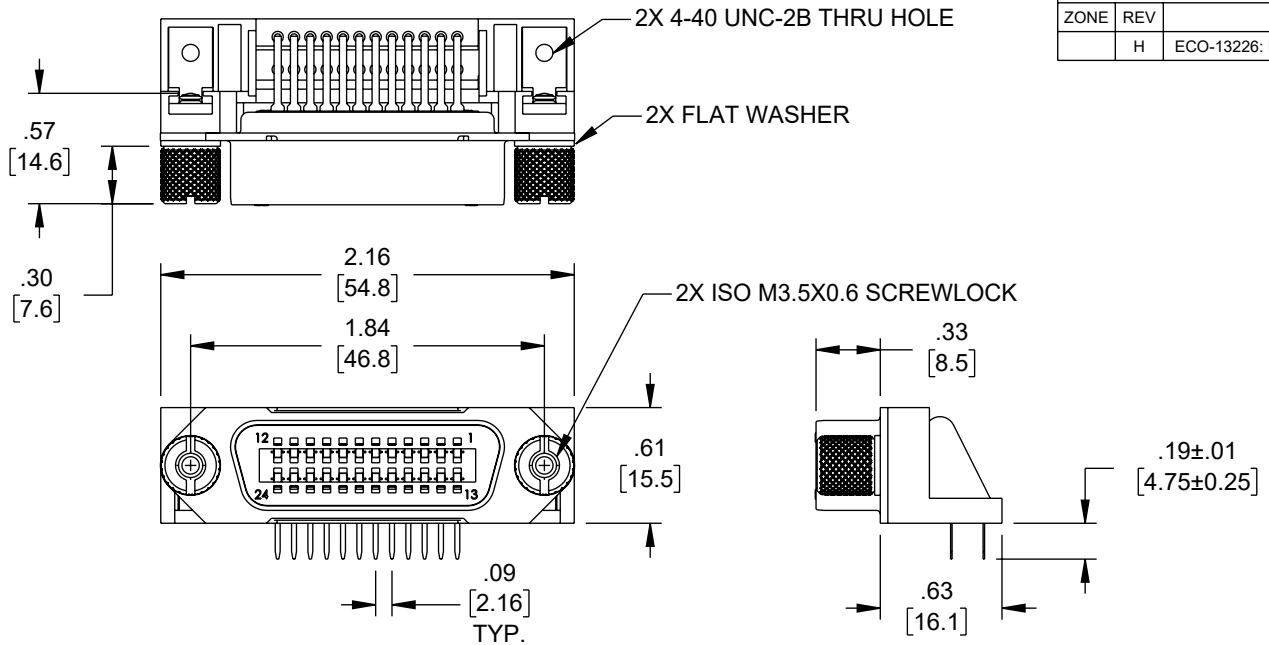

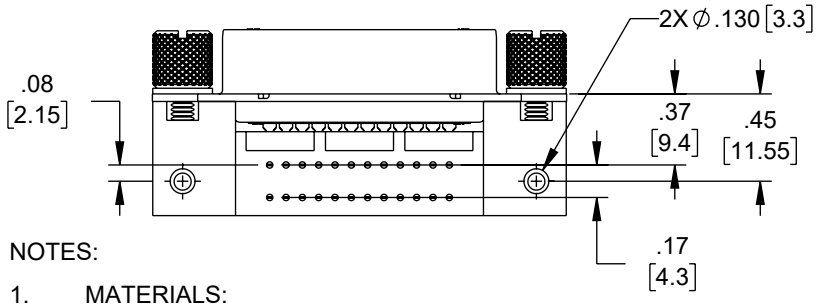

RECOMMENDED PCB HOLE LAYOUT

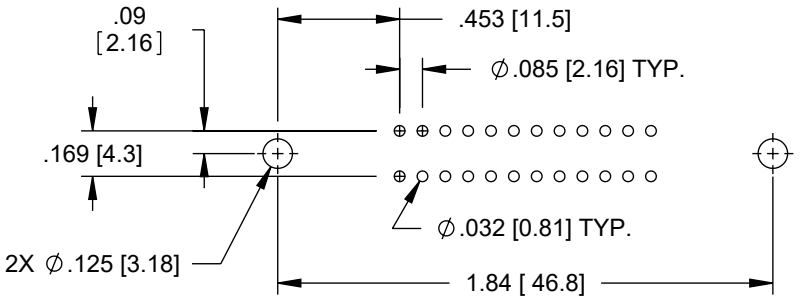

NOTES:

1. MATERIALS:
   SHELL: COLD ROLLED STEEL
   CONTACTS: COPPER ALLOY
   INSULATOR: BLUE POLYBUTYLENE TEREPHTHALATE (PBT)
   U.L. 94V-0 RATED

2. FINISHES:
   CONTACTS: GOLD PLATED
   TERMINALS: TINNED
   SHELL: NICKEL PLATED
   SCREWLOCKS: BLACK OXIDE
   SUPPLIED WITH HARDWARE ASSEMBLED.

3. TYPICAL OPERATING VOLTAGE IS 30 VOLTS

4. MAXIMUM VOLTAGE RATING IS 500 VOLTS.

5. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IAW L-COM SPEC. PS-0031.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5]	FRACTIONS
.XX = ±.02 [0.5]	± 1/32
.XXX = ±.005 [0.13]	ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com®
an INFINITE brand
Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION
CONNECTOR GPIB RA FEMALE

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	DFRISIELLO	CIB24SRA	H

LC LG Rev-D5 Asize