rotronic

Datenblatt - Fiche technique - Data sheet


11.04.5265




ROLINE VGA-Kabel HD15 ST – ST mit Ferritkern, 15m

ROLINE HD15 M/HD15 M avec noyaux de ferrite, 15m

ROLINE HQ VGA Cable with Ferrite, HD15 M – HD15 M, 15 m

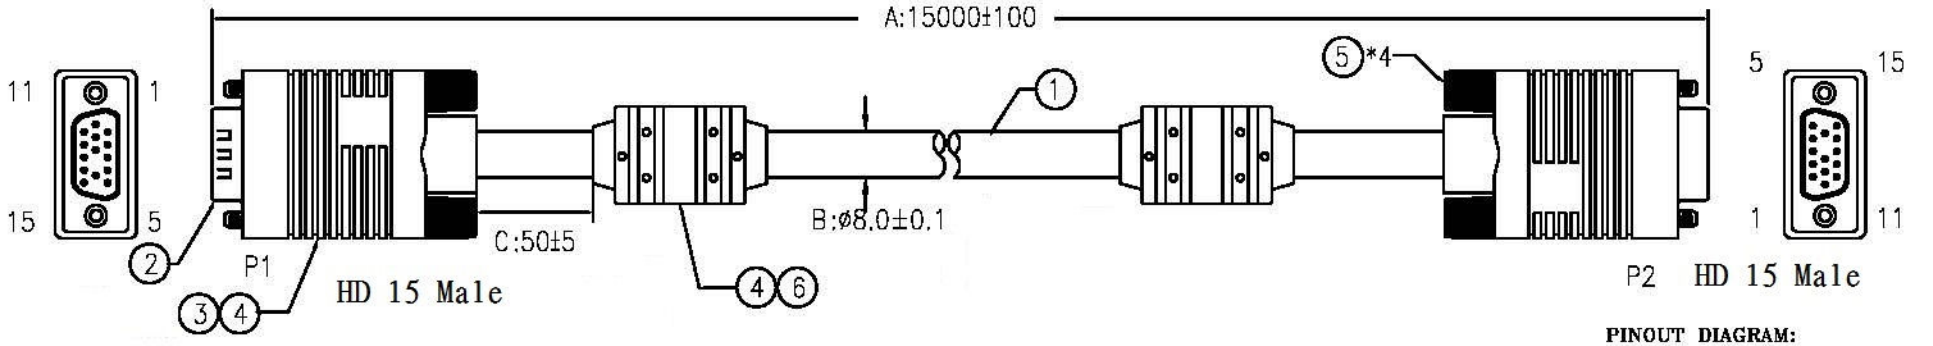

PINOUT DIAGRAM:

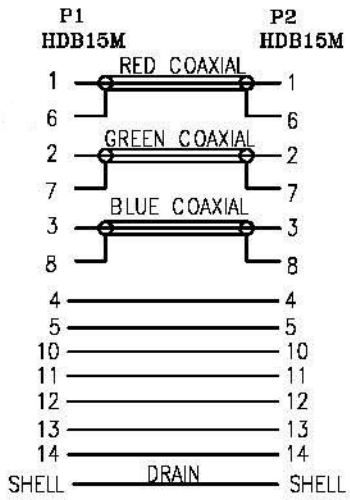

NOTES:

1) P1 & P2 HD 15 Male / Male
2) FULLY COPPER FOIL SHIELD 360° P1 & P2.
3) CABLE JACKET : PVC BLACK COLOR
4) MOLDED HOOD : BLACK COLOR
5) REMOVED PIN 9, PIN 15 IS NOT CONNECTED
6) RoHS & REACH COMPLIANT
7) 2 x FERRITE CORE, BLACK COLOR

4	OUTER JACKET PVC 45Pa BLACK(1101) (RoHS)
3	INNER JACKET:PE (RoHS)
2	HDB15M BLUE SOLDER TYPE TERMINAL GOLD FLASH W/O 9 PIN (RoHS)
1	2919(28#1C+S+MY)3+26#7C+AEB(AL/MG) OD8.0MM 15000MM BLACK(1101) (RoHS)

UNLESS OTHERWISE SPECIFIDE: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°	
DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.10mm
30.01 TO 80.00mm	±0.13mm
80.01 TO 150.00mm	±0.15mm
150.01mm	±0.20mm
MATERIAL	MATERIAL
FINISH	FINISH

rotronic

ROLINE HQ VGA Cable, w/Ferrite, HD 15 M/M, 15m, black

11.04.5265

SCALE	SHEET	UNIT	SIZE	REV.
/	1/1	MM	A4	A

WFM-ED-67B