

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING NUMBER WAS 97-101503	9/14/10	D. CASTRO

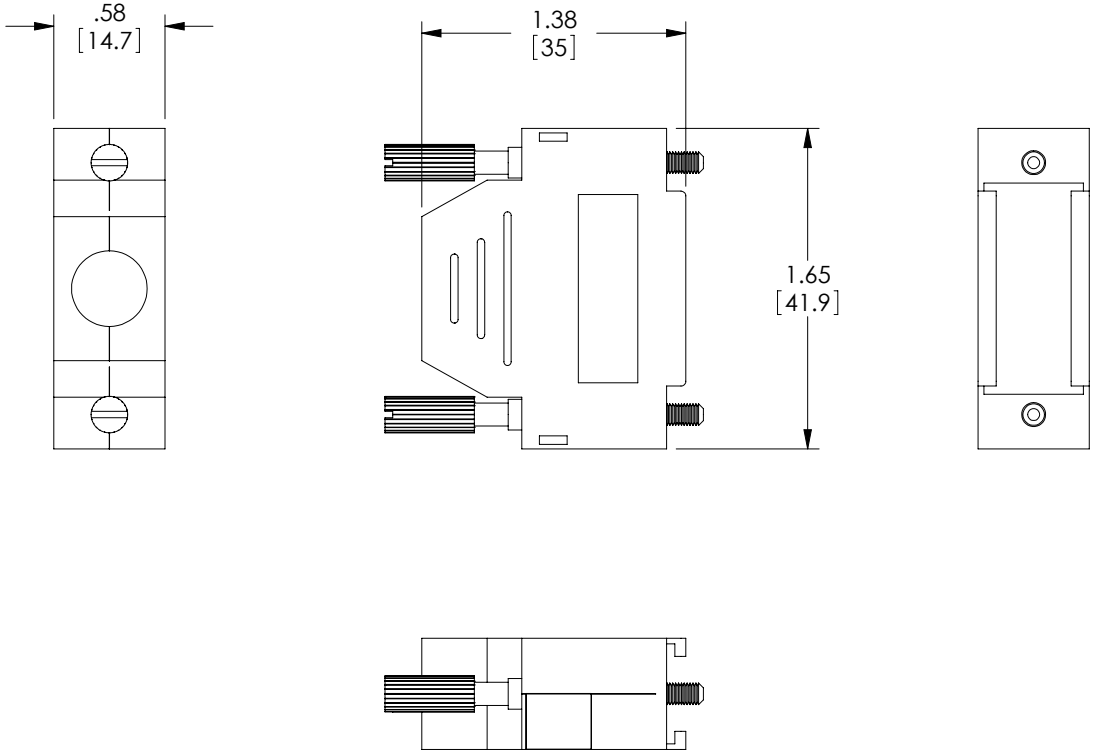

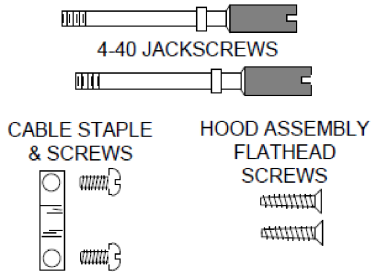

KIT CONSISTS OF TWO MOLDED ABS PLASTIC HALF HOODS, TWO NICKEL PLATED BRASS JACKSCREWS, TWO SELF TAPPING ASSEMBLY SCREWS, AND ONE CABLE STRAIN RELIEF STAPLE WITH TWO SELF TAPPING SCREWS

NOTES:

1. THIS HOOD MAY BE USED WITH ANY MALE OR FEMALE 15-PIN OR HIGH DENSITY 26-PIN D-SUB CONNECTOR. (NOT SUPPLIED) SUITABLE FOR CABLES WITH DIAMETERS UP TO .35 INCHES (8.9mm)
2. HARDWARE IS INCLUDED TO FIRMLY ATTACH THE CABLE TO ONE OF THE HOOD SECTIONS. THE HOOD SECTIONS SNAP TOGETHER AND THEN ARE SECURED WITH TWO PHILLIPS FLATHEAD SELF-TAPPING SCREWS.
3. HOOD COLOR IS CHROME PLATED, FINISH IS MATTE, EXCEPT FOR LABEL INSERT AREA.
4. HOOD ASSEMBLY IS INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D. CASTRO	9/14/10
CHECKED BY D. PARHAM	9/14/10
APPROVED BY D. FRISIELLO	9/14/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
D-SUB

PRODUCT DESCRIPTION
METALLIZED PLASTIC HOOD KIT FOR DB15

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	SDRS15HOT	A

SCALE: NONE | CAD FILE: SDRS15HOT.SLDDRW | SHEET 1 OF 1