UNIT	MM

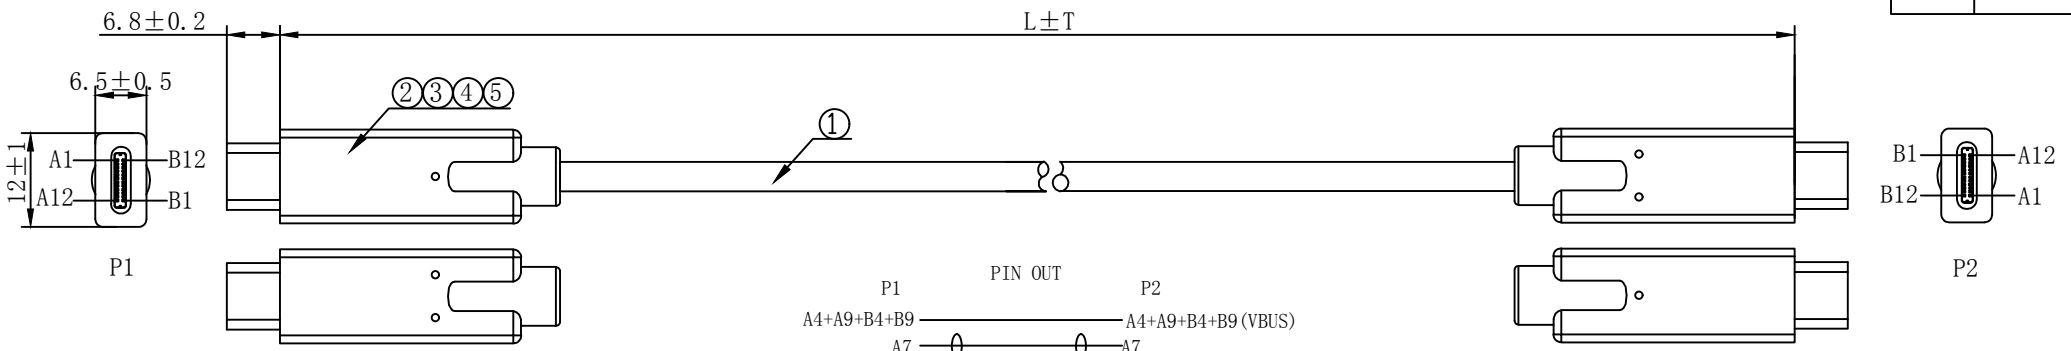

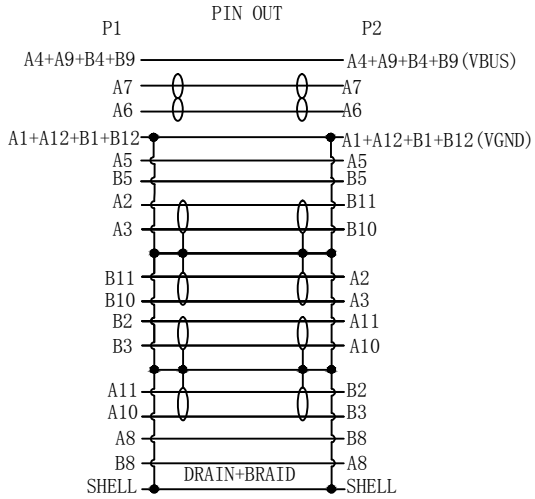

NOTE:

1. Electrical test:
   (1). 100% open short & miss wire test;
   (2). Insulation resistance:DC 100V 0.01S 5M ohm;
   (3). Contactor resistance:2 ohm Max;
   (4). Mac book pro + LG Monitor TEST:3840*2160@60Hz
   (5). Transmission rate : GEN2*2 20Gbps Current rate:5A
2. ROHS 2.0 REACH COMPLIANT
3. PRINTING:E****** 兄 AWM STYLE 2725 80℃ 30V VW-1
   SUPER HIGH SPEED USB Revision 3.2
4. Support 100W MAX

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑤	OUT MOLD	PVC Moudling	2	
④	INNER MOLD	LD-PE	2	
③	E-mark	GEN2*2 20Gbps 5A	1	
②	TYPE C	USB C/M Solder Type,Black PBT Insulation,The Pin Gold Plating, the shell for Nickel Plating+Iron Shield	2	
①	CABLE	USB 3.1 CABLE (32AWG TC*1P+E+AM)*4+32AWG TC*1P+32AWG TC*4C +22AWG TC*2C+AL+B+PVC/BLACK OD:4.5±0.2mm	1	

ITEM NO.	LENGTH
11.02.9070	500±20mm
11.02.9071	1000±30mm

DESC.	Roline USB 3.2 GEN2×2 (20Gbit/s) Type C-C,M/M

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2021.09.03	A

SECOMP