
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES DML009S-OD1	09/30/2014	D.DESJARDIN
B	ECN 11061: REVISED L-COM LOGO	04/01/2021	BGATES

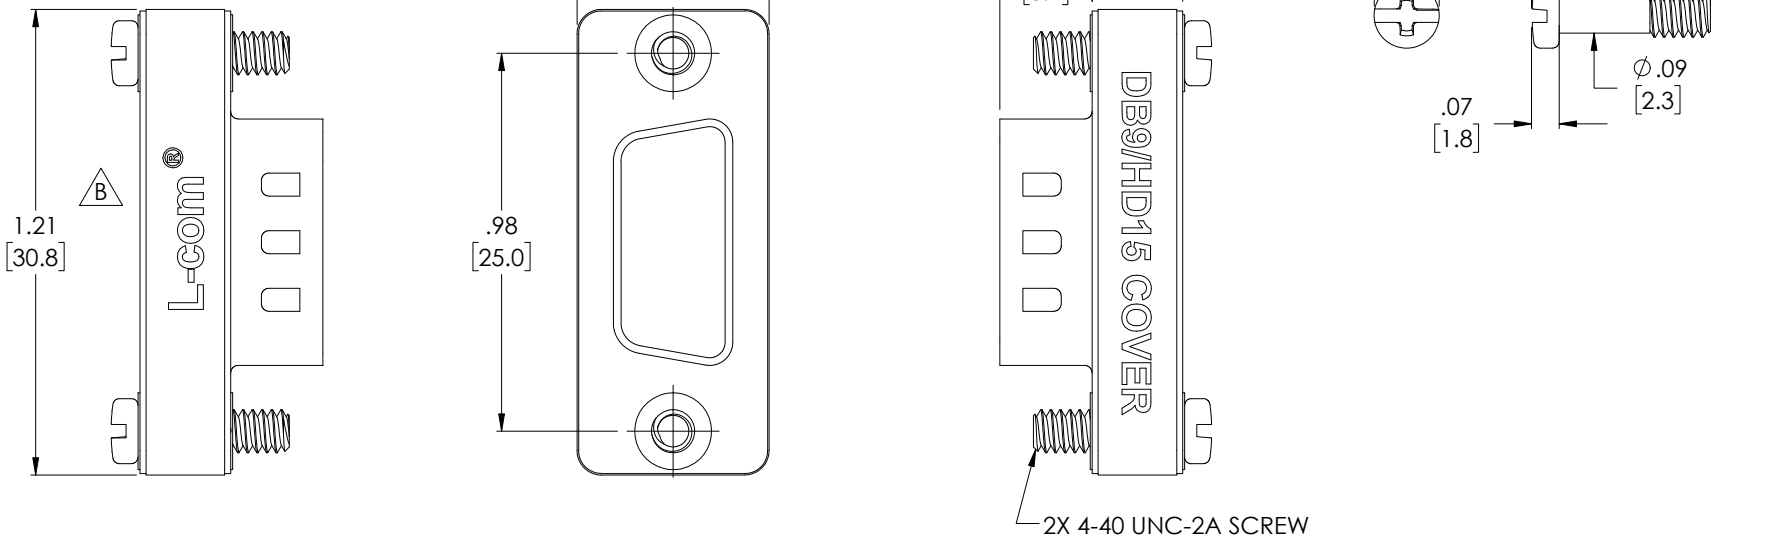

NOTES:

MATERIALS:
SHELL: NICKEL PLATED, COLD ROLLED STEEL
COVER: NICKEL PLATED, COLD ROLLED STEEL
INSULATOR: PBT GLASS FIBER REINFORCED UL94-V0, BLACK

APPLICATION:
COVER FITS STANDARD 9-CONTACT OR HIGH DENSITY 15-CONTACT FEMALE D-SUBMINIATURE RECEPTACLE.

LABELING:
B
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM REGULAR. "DB9/HD15 COVER" FONT ARIAL BOLD, TEXT HEIGHTS; .085" TEXT COLOR; WHITE.

MISCELLANEOUS:
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY P.LACLAIR	10/01/2002
CHECKED BY C.MCCORMICK	10/01/2002
APPROVED BY R.CARRICK	10/01/2002

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-com an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY: D-SUBMINIATURE

PRODUCT DESCRIPTION: COVER, FOR DB9F/HD15F SHLD

SIZE	CAGE CODE	ITEM NO.	REV.
A	43321	DML009S	B

SCALE: NONE | CAD FILE: DML009S.SLDDRW | SHEET 1 OF 1

T-Rev.D