ENGLISH

Datasheet

Cartridge Fuse

RS Stock number 537-1600



Specifications:

- Ratings above 6.3A have a maximum 0.81mm diameter lead
- Time-delay, high breaking capacity
- Ceramic tube, silver-plated endcap construction (500mA-800mA), nickel-plated brass endcap construction (1 – 12A)
- Optional sleeve is flexible flouropolymer (UL fammability rating VW-1).
- 5 x 20mm physical size
- Designed to IEC 60127-2 (500mA-10A) & extension 12A

S/N	Voltage Rating AC	Interrupting Rating @ Rated Voltage (50Hz) AC	Typical DC Cold Resistance (Ω)²	Typical Pre-arching	Typical Voltage Drop
5371600	250	1500	0.2370	0.632	189

Dimensions - mm

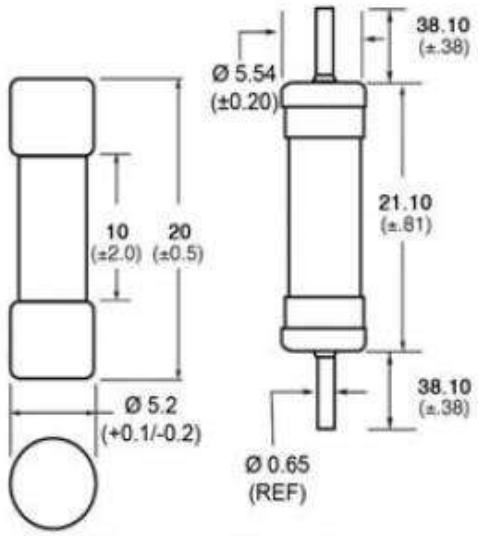

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.