
efector200

OPU200

OPU-FCKG/AS

Photoelectric sensors

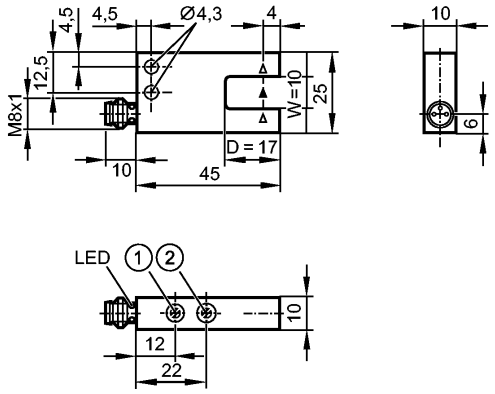

1: output function switch
2: potentiometer sensitivity

CE


Product characteristics		
Optical fork sensor		
Connector		
Automatic detection PNP/NPN		
Electrical data		
Electrical design		DC PNP/NPN
Operating voltage	[V]	10...35 DC
Current consumption	[mA]	< 40
Type of light		Infrared light 880 nm
Protection class		III
Reverse polarity protection		yes
Outputs		
Output function		light-on/dark-on mode selectable
Voltage drop	[V]	< 2.8
Current rating	[mA]	200
Short-circuit protection		pulsed
Overload protection		yes
Switching frequency	[Hz]	10000
Range		
Smallest detectable object	[mm]	0.3
Environment		
Ambient temperature	[°C]	-25...60
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[Years]	659
Mechanical data		
Fork depth D	[mm]	17
Fork width W	[mm]	10
Housing materials		housing: diecast zinc black anodised; lens: glass
Weight	[kg]	0.054
Displays / operating elements		


Output status indication	LED	yellow


Electrical connection

Connection	M8 connector

Wiring







Remarks

Pack quantity	[piece]	1