Data Sheet Aluminium Light F20 Pro 16607

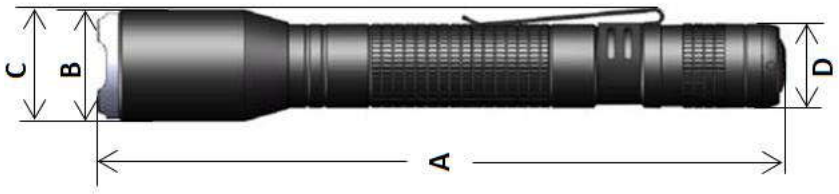

Type	16607 101 421
Designation	Aluminium Light F20 Pro
Battery required	2x AA Alkaline battery
LED	1x OSRAM P8, CCT 6000-6500 K
Luminous intensity	Spot – High: 100 lm / 1225 cd Low: 8 lm Flood – High: 250 lm / 240 cd Low: 25 lm
Run Time	Low: 35 h High: 4 h Strobe: 2 h (VARTA Longlife battery required)
Range	70 m
Material	Aluminium PC (Polycarbonate) Silicon Rubber (All contact parts made of nickel plated steel or stainless steel)
Weight	74.8 g (without batteries)
Dimensions	
A	164.1 mm
B	26 mm
C	19.5 mm
D	26.2 mm

Features (Technical)

Super bright OSRAM cool white LED

Convex focusing lens

Push switch (High/Off/Low/Off/Strobe/Off)

Tactile operation when light on (Soft touch button when light on--High/Low/Strobe)

Reset to High mode if off longer than 20 s

Twist head to focus beam (spot to flood or flood to spot)

Broad and consistent flood beam with ultra view area

Comfortable handle with knurling pattern

Bracket clip removal function

Eye risk group II

3.3 feet (1 m) drop test

10,000 switch cycle life

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

VARTA Consumer Batteries GmbH & Co. KGaA
Alfred-Krupp-Str. 9, 73479 Ellwangen, Germany
Phone: (+49) 7961/83-0, Fax: (+49) 0800 827 8274

Subject to change without prior notice!
Date of issue: 2022-10-06