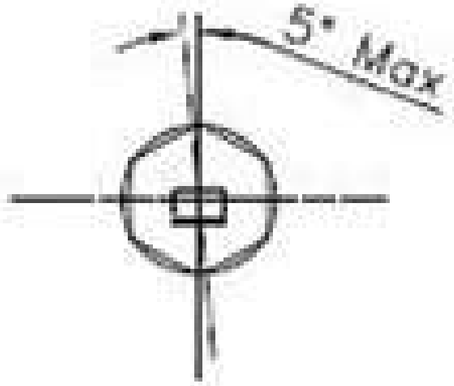

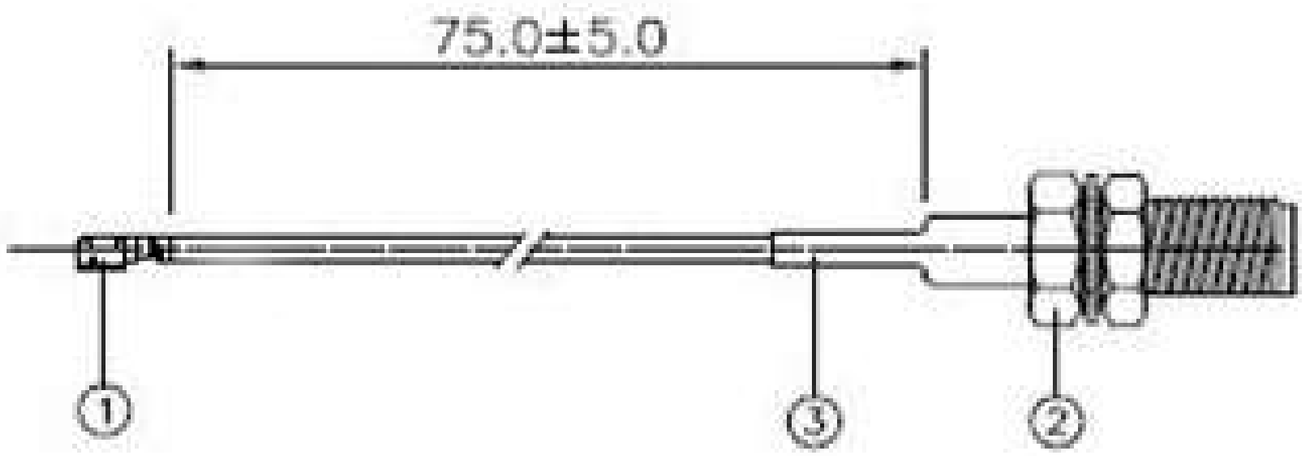









Notes

1. UFL Bulkhead Straight
2. SMA (F) Bulkhead Straight
3. Heatshrink

Attenuation (Max) : -1.5dB

VSWR (Max) : 1.5

Freq Range : 45MHz - 6GHz

Nominal Impedance: 50ohm

RoHS compliant

All Dimensions in mm

NOT TO SCALE

DESCRIPTION

Cable Assy ufl to SMA(F) Bulkhead cable Assy 75mm

FILENAME	DRAWN BY	DATE	REVISED	PAGE
CBA-UFLSMA-1.VSD	John Fairall		30/06/2012	1 of 1

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
N/A	1	First Issue	1.8.09	
	2			
	3			
	4			
	5			
	6			