MURR ELEKTRONIK
stay connected

MIRO 6.2 pluggable compl. Module Optocoupler


IN: 24 VDC - OUT: 24 VDC / 6 A

Transistor 6 A
24 V DC
Spring clamp terminals

Link to Product

Illustration



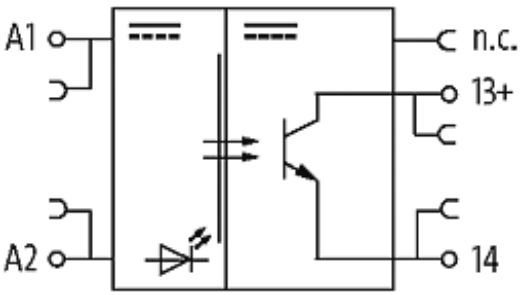

Product may differ from Image

Input	
Connection voltage - current	24 V DC (18...30 VAC/DC) - 9 mA
LED display	LED (yellow)

General data	
Test isolation voltage	50 V
Surge voltage resistance	2.5 kV
Protection	IP20
Mounting method	pluggable

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

Dimensions H × W × D	93×6.2×75.6 mm
Temperature range	-25...+50 °C
Output	
Switching time ON/OFF	15/31 µs
Switching voltage	3...30 V DC
Switching current per output	10 mA...6 A
Saturation voltage (across output)	max. 240 mV
Switching frequency	max. 500/50 Hz (ohm./ind.)
Commercial data	
country of origin	CZ
customs tariff number	85365005
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16