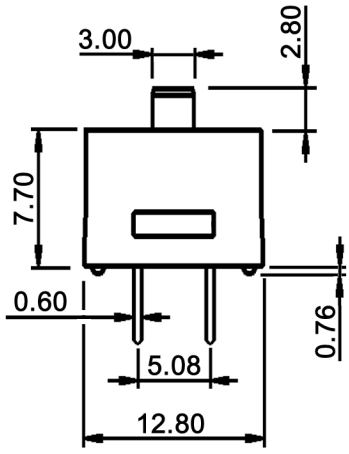

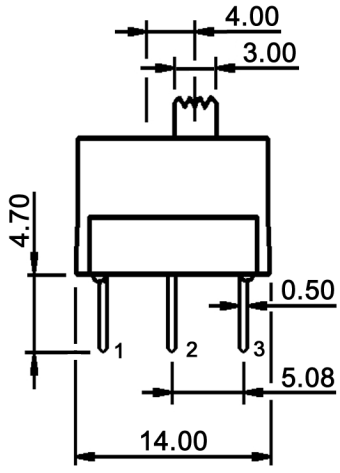

P.C. LAYOUT

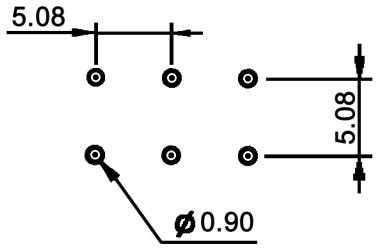

SCHEMATIC



Specifications:

Contact rating:	1A, 250V AC; 3A, 120V AC or 28V DC
Contact resistance:	50mOhm max.
Insulation resistance:	1 000MOhm min.
Dielectric strength:	1 000V RMS
Operating temperature:	-40°C to +85°C
Mechanical life:	20 000 make-and-break cycles
Min. load:	100mA, 10V DC
Soldering conditions:	auto-soldering: 260 +/-5°C, max. 10sec.
Material:	Case: nylon, white
	Actuator / housing: nylon, black
	Terminals / contact: silver plated copper alloy

RoHS-conform 2002/95/EC

Tolerances:			Date	Name
			06/04	us
Dimensions	11/08	dr		
Specifications	05/08	dr		
Soldering conditions	08/07	dr		
Schematic	08/05	dr		
Contact material	11/04	dr		
Modifications	Date	Name		

MSS 3122 N

knitter-switch

30 04 58

Page 1/1