
Prüfzange
- Anschluss über eine Sicherheits-Einbaubuchse (SEB)
- Maximale Öffnungsweite 25 mm

Best.-Nr. PZA 7524 /..(Farbe)
- Kontaktteile
  - ·Buchse **vernickelt**
  - ·Zange **verzinkt**
- **Farben** siehe Tabelle

Test clamp
- *connection through safety threaded socket (SEB)*
- *maximum opening 25 mm*

Order No. PZA 7524 /..*(colour)*
- *contact parts*
  - *· socket* ***nickel-plated***
  - *· clamp* ***zinc-plated***
- ***colours*** *see table*



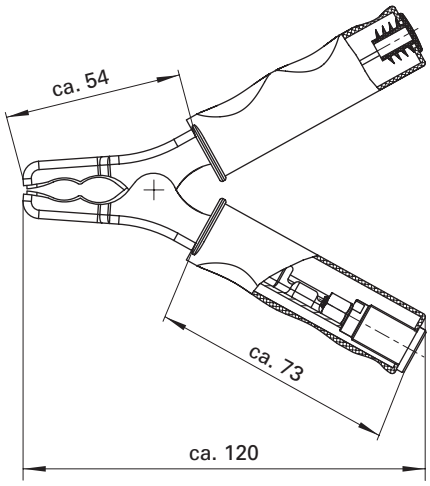

Allgemeine Angaben	
Best.-Nr. [1]	**PZA 7524 /..**(Farbe) Kontaktteile Buchse vernickelt Zange verzinkt
Farben	schwarz, rot
Technische Daten	
Anschluss	Sicherheitsbuchse Ø 4 mm
Durchgangswiderstand	3 mΩ
Bemessungsspannung [2]	33 V_{AC} / 70 V_{DC}
Bemessungsstrom [2]	32 A
Temperatur-Einsatzbereich	-

[1] andere Kontaktoberflächen und Farben auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information	
Order No. [1]	***PZA 7524 /..****(colour)* *contact parts socket nickel-plated* *clamp zinc-plated*
colours	*black, red*
Technical data	
terminal	*Safety socket Ø 4 mm*
transition resistance	*3 mΩ*
rated voltage [2]	*33 V_{AC} / 70 V_{DC}*
rated current [2]	*32 A*
operating temperature	-

[1] *other contact platings and colours on request*
[2] *at normal ambient temperatures*