
Polklemme
- mit unverlierbarem Knebelkopf
- max. leitende Gehäusewandstärke 4 mm


Best.-Nr. POL 102 / ..(Farbe)
- Kontaktteile **Messing**
- Isolierteile Polycarbonat
- **Farben** siehe Tabelle

Terminal post
- *with captive toggle head*
- *max. conducting wall thickness 4 mm*

Order No. POL 102 / *..(colour)*
- *contact parts* ***brass***
- *insulation* *polycarbonate*
- ***colours*** *see table*

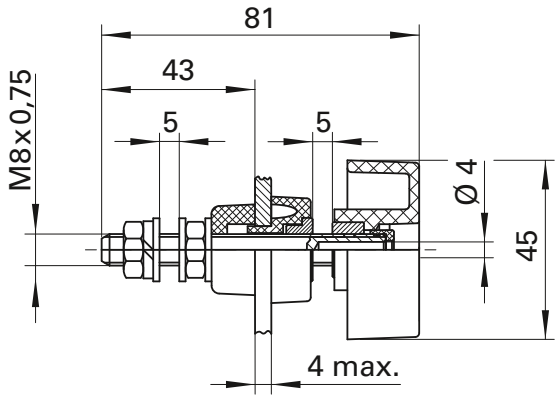

- **Montagebohrung**
  hole





Allgemeine Angaben	
Best.-Nr. [1]	**POL 102 /** ..(Farbe) Kontaktteile Messing
Farben	schwarz, rot, blau, gelb, grün, grüngelb
Technische Daten	
Anschluss	M8 x 0,75, Lötöse, Kabelschuh, Steckbuchse
Durchgangswiderstand	0,4 mΩ
Bemessungsspannung [2]	1000 V
Bemessungsstrom [2]	100 A
Betriebstemperatur	von -25 °C bis +115 °C
Anzugsdrehmoment der Befestigungsmutter	600 Ncm

[1] andere Ausführungen auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information	
Order No. [1]	***POL 102 /*** *..(colour)* *contact parts brass*
colours	*black, red, blue, yellow, green, green-yellow*
Technical data	
terminal	*M8 x 0.75, solder lug, cable lug, inline socket*
transition resistance	*0.4 mΩ*
rated voltage [2]	*1000 V*
rated current [2]	*100 A*
operating temperature	*from -25 °C to +115 °C*
max. torque fastening nut	*600 Ncm*

[1] *other designs on request*
[2] *at normal ambient temperatures*

16.09.2024